


1200 Series – Self-Aligning

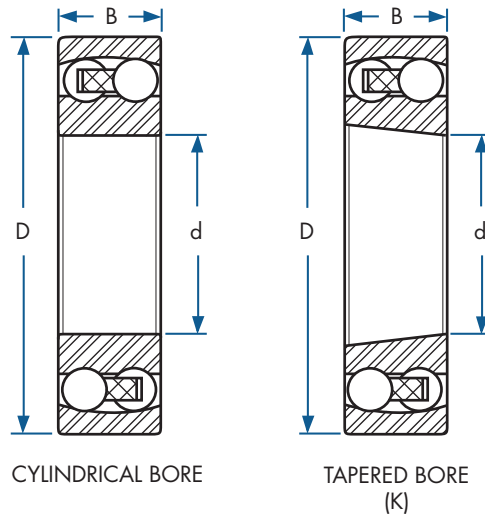

Part Number		Dimensions (mm)			Load Rating (lbs)		Limiting Speed (RPM)	
					Dynamic	Static	Grease	Oil
Cylindrical Bore	Tapered Bore	d	D	B	Cr	Cor		
1200	1200K	10	30	9	989	216	21,000	24,000
1201	1201K	12	32	10	1,007	225	18,000	22,000
1202	1202K	15	35	11	1,340	315	16,000	19,000
1203	1203K	17	40	12	1,421	360	14,000	17,000
1204	1204K	20	47	14	1,780	468	13,000	15,000
1205	1205K	25	52	15	2,176	593	11,000	13,000
1206	1206K	30	62	16	2,806	836	9,200	11,000
1207	1207K	35	72	17	2,841	917	8,000	9,400
1208	1208K	40	80	18	3,453	1,169	7,100	8,400
1209	1209K	45	85	19	3,921	1,322	6,400	7,500
1210	1210K	50	90	20	4,082	1,457	5,800	6,800
1211	1211K	55	100	21	4,820	1,798	5,300	6,200
1212	1212K	60	110	22	5,431	2,068	4,900	5,800
1213	1213K	65	120	23	5,575	2,248	4,500	5,300
1214	1214K	70	125	24	6,222	2,482	4,200	4,900
1215	1215K	75	130	25	6,978	2,824	3,900	4,600
1216	1216K	80	140	26	7,158	3,057	3,700	4,300