


# 1300 Series – Self-Aligning

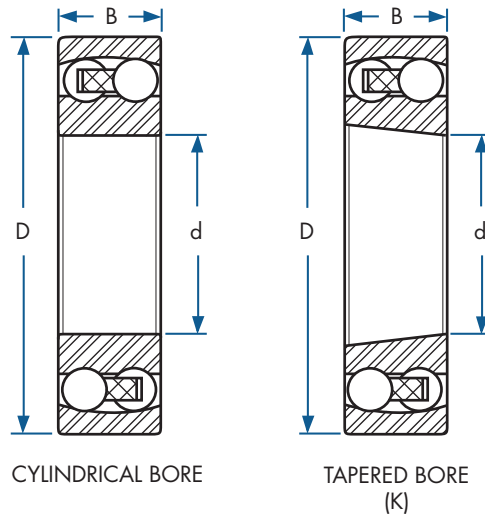

Part Number		Dimensions (mm)			Load Rating (lbs)		Limiting Speed (RPM)	
					Dynamic	Static	Grease	Oil
Cylindrical Bore	Tapered Bore	d	D	B	Cr	Cor		
1300		10	35	11	1,304	288	18,000	21,000
1301		12	37	12	1,690	387	16,000	18,000
1302		15	42	13	1,717	414	13,000	16,000
1303		17	47	14	2,250	575	12,000	14,000
1304	1304K	20	52	15	2,680	593	11,000	13,000
1305	1305K	25	62	17	3,237	899	9,100	11,000
1306	1306K	30	72	19	3,831	1,133	7,700	9,100
1307	1307K	35	80	21	4,514	1,412	6,800	8,000
1308	1308K	40	90	23	5,305	1,744	6,000	7,000
1309	1309K	45	100	25	6,852	2,284	5,400	6,300
1310	1310K	50	110	27	7,805	2,536	4,900	5,800
1311	1311K	55	120	29	9,226	3,219	4,500	5,200
1312	1312K	60	130	31	10,287	3,741	4,100	4,800
1313	1313K	65	140	33	11,096	4,118	3,900	4,500
1314		70	150	35	13,308	4,982	3,600	4,300
1315	1315K	75	160	37	14,189	5,459	3,400	4,000
1316	1316K	80	170	39	15,844	5,935	3,200	3,800