


2200 Series – Self-Aligning

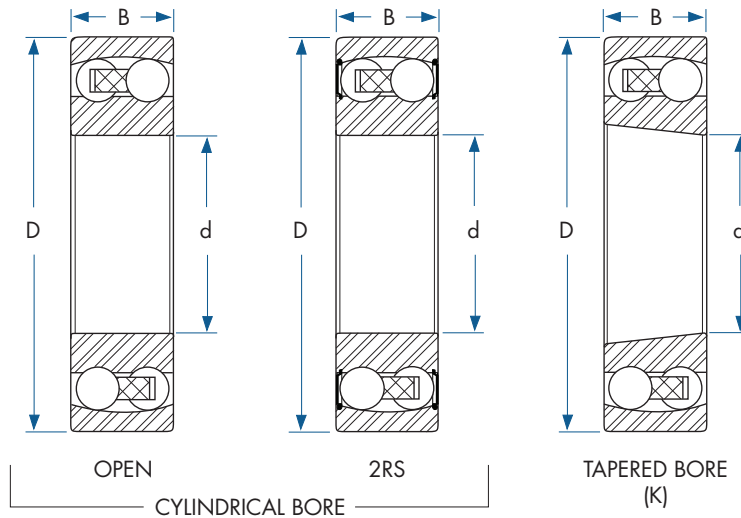

Part Number		Dimensions (mm)			Load Rating (lbs)		Limiting Speed (RPM)		
Cylindrical Bore	Tapered Bore	d	D	B	Dynamic	Static	Grease		Oil
					Cr	Cor	OPEN	2RS	OPEN
2200		10	30	14	1,331	288	19,000	17,000	23,000
2201		12	32	14	1,376	315	17,000	16,000	20,000
2202		15	35	14	1,385	333	15,000	14,000	18,000
2203		17	40	16	1,762	432	13,000	12,000	16,000
2204	2204K	20	47	18	2,266	593	12,000	10,000	14,000
2205	2205K	25	52	18	2,266	629	10,000	9,000	12,000
2206	2206K	30	62	20	2,806	2,836	8,600	7,500	10,000
2207	2207K	35	72	23	3,885	1,187	7,500	6,300	8,800
2208	2208K	40	80	23	4,028	1,331	6,700	5,600	7,900
2209	2209K	45	85	23	4,190	1,466	6,000	5,300	7,100
2210	2210K	50	90	23	4,190	1,529	5,500	4,800	6,400
2211	2211K	55	100	25	4,820	1,798	5,000	4,300	5,800
2212	2212K	60	110	28	6,133	2,266	4,600	3,800	5,400
2213	2213K	65	120	31	7,823	2,949	4,300	3,600	5,100
2214		70	125	31	7,895	3,075	4,100	3,400	4,700
2215	2215K	75	130	31	7,949	3,201	3,800	3,200	4,400
2216	2216K	80	140	33	8,812	3,579	3,300	3,000	3,900