


2300 Series – Self-Aligning

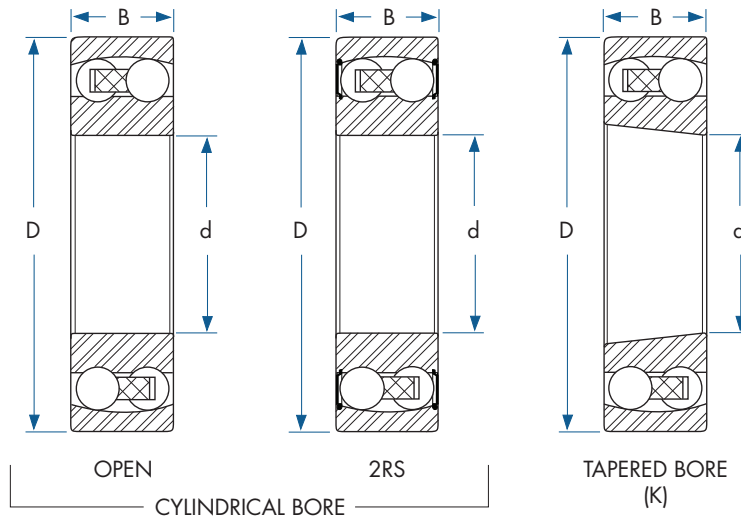

Part Number		Dimensions (mm)			Load Rating (lbs)		Limiting Speed (RPM)		
Cylindrical Bore	Tapered Bore	d	D	B	Dynamic	Static	Grease		Oil
					Cr	Cor	OPEN	2RS	OPEN
2300		10	35	17	1,673	378	17,000	17,000	20,000
2301		12	37	17	1,745	414	15,000	14,000	17,000
2302		15	42	17	2,176	522	13,000	12,000	15,000
2303		17	47	19	2,608	647	11,000	11,000	14,000
2304	2304K	20	52	21	3,237	845	10,000	9,500	12,000
2305	2305K	25	62	24	4,388	1,187	8,500	7,500	10,000
2306	2306K	30	72	27	5,647	1,573	7,200	6,700	8,500
2307	2307K	35	80	31	7,086	2,032	6,300	5,600	7,400
2308	2308K	40	90	33	8,075	2,428	5,600	5,000	6,600
2309	2309K	45	100	36	9,783	3,003	5,000	4,500	5,900
2310	2310K	50	110	40	11,618	3,651	4,600	4,000	5,400
2311	2311K	55	120	43	13,542	4,316	4,200	3,800	4,900
2312	2312K	60	130	46	15,682	5,089	3,800	3,600	4,500
2313	2313K	65	140	48	17,229	5,845	3,300	3,400	4,000
2314	2314K	70	150	51	16,114	5,701	3,100	3,200	3,700
2315	2315K	75	160	55	18,524	6,618	2,700	3,000	3,200
2316	2316K	80	170	58	23,199	8,219	2,500	2,800	3,000