


N200E series

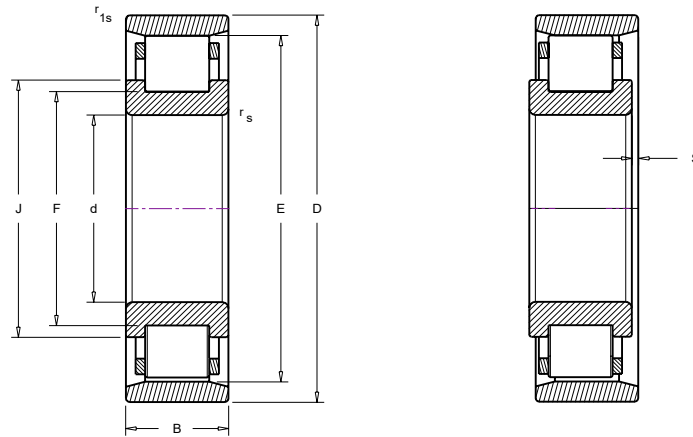

Bearing Number	Dimensions (mm)									Load Ratings (lbf)		Limiting Speed (RPM)	Weight (lbs)
	d	D	B	E	F	J	s*	r _s	r _{1s}	Dynamic	Static		
								min	min	Cr	Cor		
N202E	15	35	11	30.3	19.3	21.6	0.5	0.6	0.3	2923	2248	22000	0.1
N203E	17	40	12	35.1	22.1	24.9	1.2	0.6	0.3	3597	2923	18000	0.1
N204E	20	47	14	41.5	26.5	29.7	0.8	1.0	0.6	5845	5171	16000	0.2
N205E	25	52	15	46.5	31.5	34.7	1.3	1.0	0.6	6744	6295	15000	0.3
N206E	30	62	16	55.5	37.5	41.3	1.4	1.0	0.6	8768	8768	12000	0.4
N207E	35	72	17	64.0	44.0	48.0	0.7	1.1	0.6	11240	11240	10000	0.7
N208E	40	80	18	71.5	49.5	54.0	1.0	1.1	1.1	12589	12364	9000	0.8
N209E	45	85	19	76.5	54.5	59.0	1.0	1.1	1.1	14163	14837	8500	0.9
N210E	50	90	20	81.5	59.5	64.0	1.3	1.1	1.1	14837	16186	8000	1.1
N211E	55	100	21	90.0	66.0	70.8	0.8	1.5	1.1	19334	22256	7000	1.4
N212E	60	110	22	100.0	72.0	77.5	1.6	1.5	1.5	21582	23830	6300	1.7
N213E	65	120	23	108.5	78.5	84.4	1.4	1.5	1.5	24729	27427	6000	2.3
N214E	70	125	24	113.5	83.5	89.4	1.1	1.5	1.5	27202	31698	5300	2.4
N215E	75	130	25	118.5	88.5	94.3	1.1	1.5	1.5	29900	36082	5300	2.6
N216E	80	140	26	127.3	95.3	101.5	1.2	2.0	2.0	31923	38442	4800	3.4
N217E	85	150	28	136.5	100.5	107.5	0.7	2.0	2.0	37543	44737	4500	4.2
N218E	90	160	30	145.0	107.0	114.3	1.4	2.0	2.0	41590	49908	4300	5.1
N219E	95	170	32	154.5	112.5	120.5	0.6	2.1	2.1	50357	60698	3800	6.3
N220E	100	180	34	163.0	119.0	127.3	1.4	2.1	2.1	56877	69916	3800	7.6
N221E	105	190	36	171.5	125.5	134.5	1.2	2.1	2.1	59687	71489	3600	8.6
N222E	110	200	38	180.5	132.5	141.6	1.4	2.1	2.1	66543	83404	3400	10.6
N224E	120	215	40	195.5	143.5	153.2	1.4	2.1	2.1	77109	97792	3200	12.7
N226E	130	230	40	209.5	153.5	163.9	1.2	3.0	3.0	82505	103525	3000	14.2
N228E	140	250	42	225.0	169.0	179.4	2.0	3.0	3.0	90823	119823	2800	20.5
N230E	150	270	45	242.0	182.0	193.1	4.0	3.0	3.0	97792	128366	2500	26.8
N232E	160	290	48	259.0	195.0	206.8	4.1	3.0	3.0	110606	146800	2300	34.4
N234E	170	310	52	279.0	207.0	218.4	4.4	4.0	4.0	131738	173328	1600	39.9
N238E	190	340	55	306.0	230.0	243.9	4.7	4.0	4.0	151971	206712	1200	50.3
N240E	200	360	58	323.0	243.0	258.2	5.0	4.0	4.0	167483	229980	800	67.5

* Permissible axial displacement