


SS1600 series



SEALED
(2RS)



SHIELDED
(ZZ)

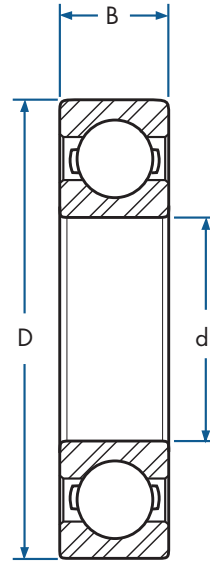

Bearing Size	d	D	B	Load Rating (lbf)		Limiting Speed (RPM)	
				Dynamic	Static	Grease	
			Cr	Cor	2RS	ZZ	
SS1614	1/8	3/8	0.1562	912	416	11250	18750
SS1615	1/8	1/2	0.1719	916	424	11250	18750
SS1616	3/16	1/2	0.196	920	360	11250	18750
SS1620	3/16	5/8	0.196	1352	640	9000	16500
SS1621	1/4	5/8	0.196	1360	652	9000	16500
SS1622	1/4	3/4	0.2812	1368	660	9000	16500
SS1623	3/8	7/8	0.2812	1376	668	9000	16500
SS1628	1/2	1-1/8	0.3125	1680	876	7500	12750
SS1630	5/8	1-3/8	0.3438	1688	892	7500	12750
SS1633	3/4	1-5/8	0.4375	1680	896	6750	10500
SS1635	7/8	1-7/8	0.5	1688	912	6750	10500