



Sheaves

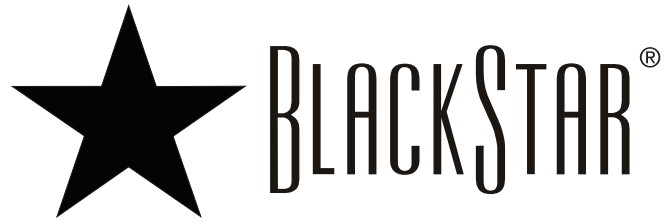

1B/QD STYLE

FOR USE WITH A AND B SECTION BELTS

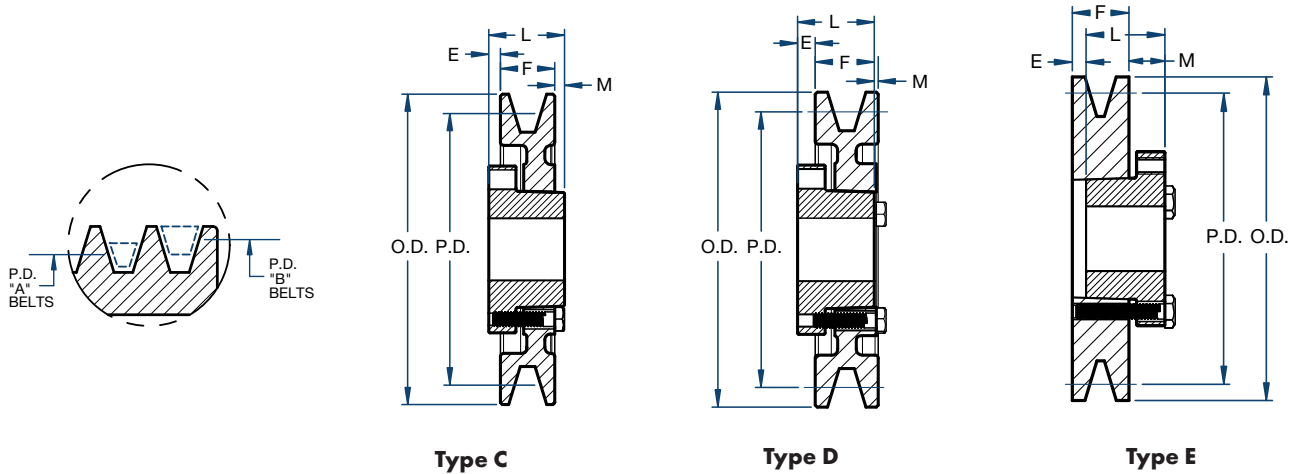

Part No.	Bushing	Bore Range (in)	Type	Diameter (in)			Dimensions (in)				Weight less Bore (lbs)
				Pitch B	Pitch A	Outside	E	F	L	M	
1B34SH	SH	1/2 - 1-5/8	E	3.4	3.0	3.75	7/32	7/8	1-5/16	21/32	2.0
1B36SH	SH	1/2 - 1-5/8	D	3.6	3.2	3.95	19/32	7/8	1-5/16	5/32	2.2
1B38SH	SH	1/2 - 1-5/8	D	3.8	3.4	4.15	19/32	7/8	1-5/16	5/32	2.4
1B40SH	SH	1/2 - 1-5/8	C	4.0	3.6	4.35	11/32	7/8	1-5/16	3/32	2.7
1B42SH	SH	1/2 - 1-5/8	C	4.2	3.8	4.55	11/32	7/8	1-5/16	3/32	2.9
1B44SH	SH	1/2 - 1-5/8	C	4.4	4.0	4.75	11/32	7/8	1-5/16	3/32	3.4
1B46SDS	SDS	1/2 - 2	C	4.6	4.2	4.95	11/32	7/8	1-5/16	3/32	4.0
1B48SDS	SDS	1/2 - 2	C	4.8	4.4	5.15	11/32	7/8	1-5/16	3/32	4.3
1B50SDS	SDS	1/2 - 2	C	5.0	4.6	5.35	11/32	7/8	1-5/16	3/32	4.7
1B52SDS	SDS	1/2 - 2	C	5.2	4.8	5.55	11/32	7/8	1-5/16	3/32	5.0
1B54SDS	SDS	1/2 - 2	C	5.4	5.0	5.75	11/32	7/8	1-5/16	3/32	5.3
1B56SDS	SDS	1/2 - 2	C	5.6	5.2	5.95	11/32	7/8	1-5/16	3/32	5.6
1B58SDS	SDS	1/2 - 2	C	5.8	5.4	6.15	11/32	7/8	1-5/16	3/32	5.9
1B60SDS	SDS	1/2 - 2	C	6.0	5.6	6.35	11/32	7/8	1-5/16	3/32	6.2
1B62SDS	SDS	1/2 - 2	C	6.2	5.8	6.55	11/32	7/8	1-5/16	3/32	6.5
1B64SDS	SDS	1/2 - 2	C	6.4	6.0	6.75	11/32	7/8	1-5/16	3/32	6.8
1B66SDS	SDS	1/2 - 2	C	6.6	6.2	6.95	11/32	7/8	1-5/16	3/32	7.2
1B68SDS	SDS	1/2 - 2	C	6.8	6.4	7.15	11/32	7/8	1-5/16	3/32	7.5
1B70SDS	SDS	1/2 - 2	C	7.0	6.6	7.35	11/32	7/8	1-5/16	3/32	7.8
1B74SDS	SDS	1/2 - 2	D	7.4	7.0	7.75	17/32	1	1-5/16	7/32	8.8
1B80SDS	SDS	1/2 - 2	D	8.0	7.6	8.35	17/32	1	1-5/16	7/32	9.6
1B86SDS	SDS	1/2 - 2	D	8.6	8.2	8.95	17/32	1	1-5/16	7/32	10.0
1B94SDS	SDS	1/2 - 2	D	9.4	9.0	9.75	17/32	1	1-5/16	7/32	10.5
1B110SDS	SDS	1/2 - 2	D	11.0	10.6	11.35	17/32	1	1-5/16	7/32	11.0
1B124SDS	SDS	1/2 - 2	D	12.4	12.0	12.75	17/32	1	1-5/16	7/32	12.0
1B136SDS	SDS	1/2 - 2	D	13.6	13.2	13.95	17/32	1	1-5/16	7/32	14.0
1B154SK	SK	1/2 - 2-5/8	C	15.4	15.0	15.75	21/32	1	1-15/16	9/32	16.0
1B160SK	SK	1/2 - 2-5/8	C	16.0	15.6	16.35	21/32	1	1-15/16	9/32	16.6
1B184SK	SK	1/2 - 2-5/8	C	18.4	18.0	18.75	21/32	1	1-15/16	9/32	18.0
1B200SK	SK	1/2 - 2-5/8	C	20.0	19.6	20.35	21/32	1	1-15/16	9/32	20.0