


# Sheaves

## 2C/QD STYLE

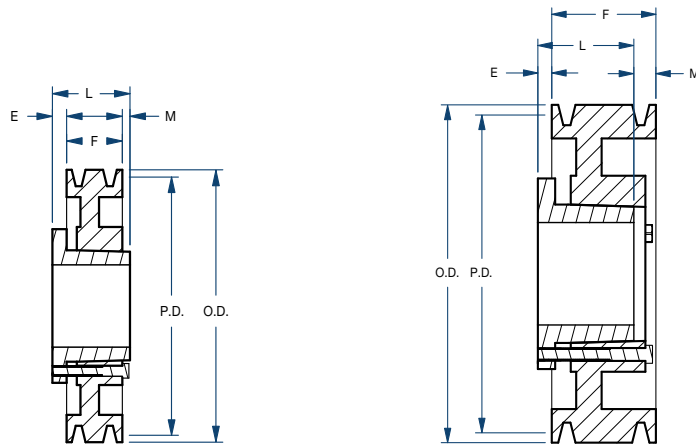

Type C

Type D

Part No.	Bushing	Bore Range (in)	Type	Diameter (in)		Dimensions (in)				Weight less Bushing (lbs)
				Pitch	Outside	E	F	L	M	
2C70SF	SF	1/2 – 2-15/16	D	7.0	7.40	3/32	2-1/4	2-1/16	9/32	15.0
2C75SF	SF	1/2 – 2-15/16	D	7.5	7.90	3/32	2-1/4	2-1/16	9/32	17.0
2C80SF	SF	1/2 – 2-15/16	D	8.0	8.40	3/32	2-1/4	2-1/16	9/32	18.0
2C85SF	SF	1/2 – 2-15/16	D	8.5	8.90	3/32	2-1/4	2-1/16	9/32	19.0
2C90SF	SF	1/2 – 2-15/16	D	9.0	9.40	3/32	2-1/4	2-1/16	9/32	20.0
2C95SF	SF	1/2 – 2-15/16	D	9.5	9.90	3/32	2-1/4	2-1/16	9/32	21.0
2C100SF	SF	1/2 – 2-15/16	D	10.0	10.40	3/32	2-1/4	2-1/16	9/32	22.0
2C105SF	SF	1/2 – 2-15/16	D	10.5	10.90	3/32	2-1/4	2-1/16	9/32	23.0
2C110SF	SF	1/2 – 2-15/16	D	11.0	11.40	3/32	2-1/4	2-1/16	9/32	24.0
2C120SF	SF	1/2 – 2-15/16	D	12.0	12.40	11/32	2-1/4	2-1/16	17/32	25.0
2C130SF	SF	1/2 – 2-15/16	D	13.0	13.40	11/32	2-1/4	2-1/16	17/32	28.0
2C140SF	SF	1/2 – 2-15/16	D	14.0	14.40	11/32	2-1/4	2-1/16	17/32	31.0
2C160SF	SF	1/2 – 2-15/16	D	16.0	16.40	11/32	2-1/4	2-1/16	17/32	36.0
2C180SF	SF	1/2 – 2-15/16	D	18.0	18.40	11/32	2-1/4	2-1/16	17/32	39.0
2C200SF	SF	1/2 – 2-15/16	D	20.0	20.40	11/32	2-1/4	2-1/16	17/32	48.0
2C240SF	SF	1/2 – 2-15/16	D	24.0	24.40	11/32	2-1/4	2-1/16	17/32	60.0
2C300F	F	1 – 4	C	30.0	30.40	1-7/32	2-1/4	3-3/4	9/32	85.0