


Sheaves



BLACKSTAR®

3V SERIES 3 GROOVE/QD

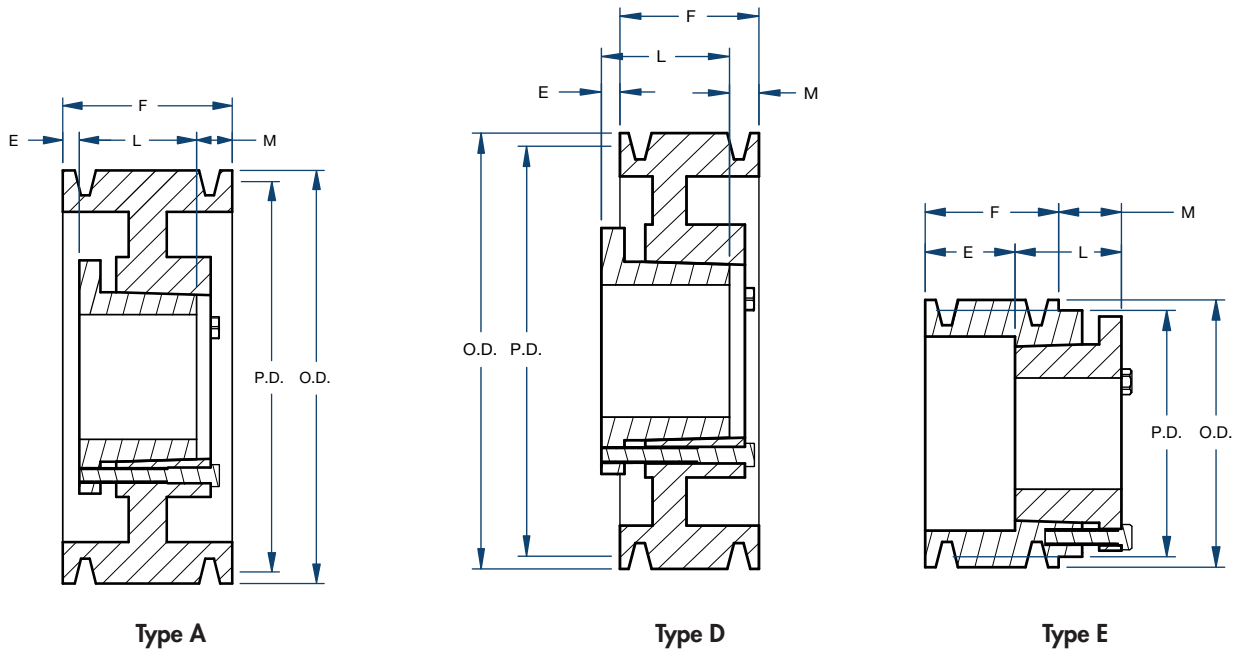

Part Number	Bushing	Bore Range	Type	Diameter (in)		Dimensions (in)				Weight less Bushing (lbs)
				Pitch	Outside	E	F	L	M	
3-3V250JA	JA	1/2 – 1-1/4	E	2.45	2.50	1-13/32	1-1/2	1	29/32	0.8
3-3V265JA	JA	1/2 – 1-1/4	D	2.60	2.65	3/8	1-1/2	1	7/8	1.0
3-3V280JA	JA	1/2 – 1-1/4	D	2.75	2.80	3/8	1-1/2	1	7/8	1.4
3-3V300SH	SH	1/2 – 1-5/8	E	2.95	3.00	1-5/32	1-1/2	1-5/16	31/32	1.7
3-3V315SH	SH	1/2 – 1-5/8	E	3.10	3.15	1-5/32	1-1/2	1-5/16	31/32	1.8
3-3V335SH	SH	1/2 – 1-5/8	D	3.30	3.35	17/32	1-1/2	1-5/16	23/32	1.9
3-3V365SH	SH	1/2 – 1-5/8	D	3.60	3.65	17/32	1-1/2	1-5/16	23/32	2.3
3-3V412SH	SH	1/2 – 1-5/8	A	4.07	4.12	1/32	1-1/2	1-5/16	5/32	2.8
3-3V450SDS	SDS	1/2 – 2	A	4.45	4.50	1/32	1-1/2	1-5/16	5/32	3.5
3-3V475SDS	SDS	1/2 – 2	A	4.70	4.75	1/32	1-1/2	1-5/16	5/32	4.0
3-3V500SDS	SDS	1/2 – 2	A	4.95	5.00	1/32	1-1/2	1-5/16	5/32	4.5
3-3V530SDS	SDS	1/2 – 2	A	5.25	5.30	1/32	1-1/2	1-5/16	5/32	5.2
3-3V560SDS	SDS	1/2 – 2	A	5.55	5.60	1/32	1-1/2	1-5/16	5/32	6.0
3-3V600SDS	SDS	1/2 – 2	A	5.95	6.00	1/32	1-1/2	1-5/16	5/32	7.0
3-3V650SDS	SDS	1/2 – 2	A	6.45	6.50	1/32	1-1/2	1-5/16	5/32	8.1
3-3V690SDS	SDS	1/2 – 2	A	6.85	6.90	1/32	1-1/2	1-5/16	5/32	8.9
3-3V800SK	SK	1/2 – 2-5/8	D	7.95	8.00	17/32	1-1/2	1-15/16	3/32	11.3
3-3V1060SK	SK	1/2 – 2-5/8	D	10.55	10.60	17/32	1-1/2	1-15/16	3/32	14.0
3-3V1400SK	SK	1/2 – 2-5/8	D	13.95	14.00	17/32	1-1/2	1-15/16	3/32	21.6
3-3V1900SF	SF	1/2 – 2-15/16	D	18.95	19.00	19/32	1-1/2	2-1/16	1/32	32.1
3-3V2500SF	SF	1/2 – 2-15/16	D	24.95	25.00	19/32	1-1/2	2-1/16	1/32	50.0
3-3V3350SF	SF	1/2 – 2-15/16	D	33.45	33.50	19/32	1-1/2	2-1/16	1/32	78.0