



# Sheaves

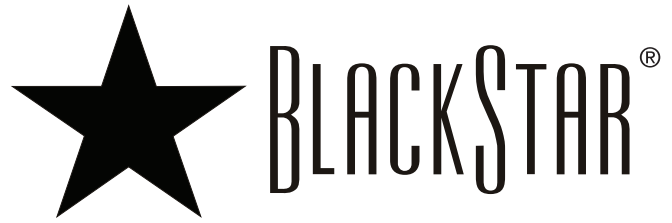

## 3V SERIES 4 GROOVE/QD

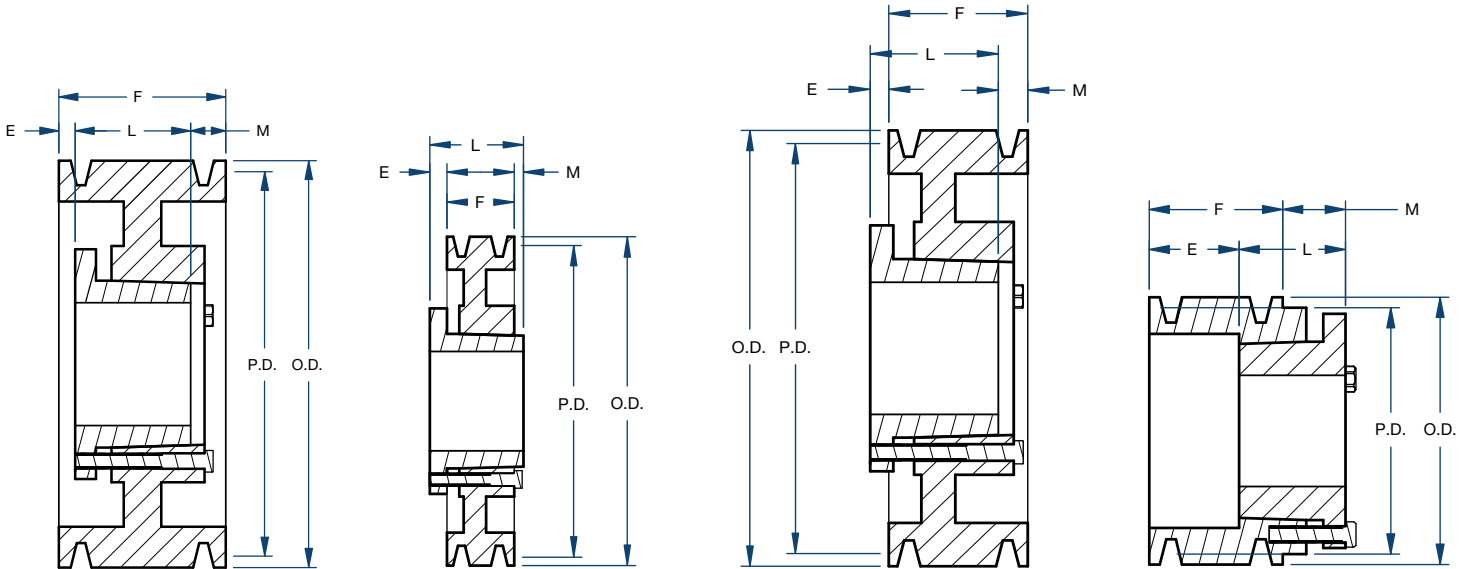

Type A

Type C

Type D

Type E

Part Number	Bushing	Bore Range	Type	Diameter (in)		Dimensions (in)				Weight less Bushing (lbs)
				Pitch	Outside	E	F	L	M	
4-3V265JA	JA	1/2 - 1-1/4	D	2.60	2.65	3/8	1-29/32	1	1-9/32	1.3
4-3V280JA	JA	1/2 - 1-1/4	D	2.75	2.80	3/8	1-29/32	1	1-9/32	1.7
4-3V300SH	SH	1/2 - 1-5/8	E	2.95	3.00	1-1/2	1-29/32	1-5/16	29/32	2.0
4-3V315SH	SH	1/2 - 1-5/8	E	3.10	3.15	1-1/2	1-29/32	1-5/16	29/32	2.2
4-3V335SH	SH	1/2 - 1-5/8	D	3.30	3.35	17/32	1-29/32	1-5/16	1-1/8	2.3
4-3V365SH	SH	1/2 - 1-5/8	D	3.60	3.65	17/32	1-29/32	1-5/16	1-1/8	2.8
4-3V412SH	SH	1/2 - 1-5/8	A	4.07	4.12	5/32	1-29/32	1-5/16	7/16	3.4
4-3V450SDS	SDS	1/2 - 2	A	4.45	4.50	5/32	1-29/32	1-5/16	7/16	4.0
4-3V475SDS	SDS	1/2 - 2	A	4.70	4.75	5/32	1-29/32	1-5/16	7/16	4.6
4-3V500SDS	SDS	1/2 - 2	A	4.95	5.00	5/32	1-29/32	1-5/16	7/16	5.2
4-3V530SDS	SDS	1/2 - 2	A	5.25	5.30	5/32	1-29/32	1-5/16	7/16	5.8
4-3V560SDS	SDS	1/2 - 2	A	5.55	5.60	5/32	1-29/32	1-5/16	7/16	6.8
4-3V600SK	SK	1/2 - 2-5/8	D	5.95	6.00	5/32	1-29/32	1-15/16	1/8	8.3
4-3V650SK	SK	1/2 - 2-5/8	D	6.45	6.50	5/32	1-29/32	1-15/16	1/8	10.0
4-3V690SK	SK	1/2 - 2-5/8	D	6.85	6.90	5/32	1-29/32	1-15/16	1/8	11.9
4-3V800SK	SK	1/2 - 2-5/8	D	7.95	8.00	5/32	1-29/32	1-15/16	1/8	13.0
4-3V1060SK	SK	1/2 - 2-5/8	D	10.55	10.60	5/32	1-29/32	1-15/16	1/8	16.5
4-3V1400SK	SK	1/2 - 2-5/8	D	13.95	14.00	5/32	1-29/32	1-15/16	1/8	22.5
4-3V1900SF	SF	1/2 - 2-15/16	D	18.95	19.00	7/32	1-29/32	2-1/16	1/16	35.0
4-3V2500SF	SF	1/2 - 2-15/16	D	24.95	25.00	7/32	1-29/32	2-1/16	1/16	57.0
4-3V3350E	E	7/8 - 3-1/2	C	33.45	33.50	21/32	1-29/32	2-3/4	3/16	84.0