


Sheaves




BLACKSTAR®


5V SERIES 4 GROOVE/QD

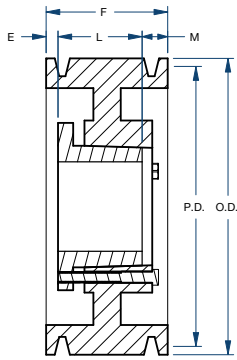


Type A



Type B

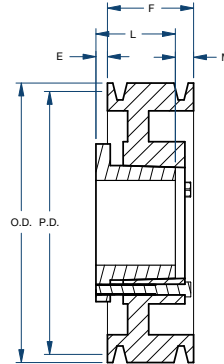

Type D



Type E

Part Number	Bushing	Bore Range	Type	Diameter (in)		Dimensions (in)				Weight less Bushing (lbs)
				Pitch	Outside	E	F	L	M	
4-5V440SD	SD	1/2 - 2	E	4.30	4.40	1-29/32	3-1/16	1-13/16	21/32	7.5
4-5V465SD	SD	1/2 - 2	E	4.55	4.65	1-29/32	3-1/16	1-13/16	21/32	8.0
4-5V490SD	SD	1/2 - 2	A	4.80	4.90	21/32	3-1/16	1-13/16	19/32	8.5
4-5V520SD	SD	1/2 - 2	A	5.10	5.20	21/32	3-1/16	1-13/16	19/32	8.8
4-5V550SD	SD	1/2 - 2	A	5.40	5.50	21/32	3-1/16	1-13/16	19/32	9.3
4-5V590SD	SD	1/2 - 2	A	5.80	5.90	21/32	3-1/16	1-13/16	19/32	10.1
4-5V630SK	SK	1/2 - 2-5/8	A	6.20	6.30	17/32	3-1/16	1-15/16	19/32	11.8
4-5V670SK	SK	1/2 - 2-5/8	A	6.60	6.70	17/32	3-1/16	1-15/16	19/32	13.6
4-5V710SF	SF	1/2 - 2-15/16	A	7.00	7.10	7/32	3-1/16	2-1/16	25/32	14.9
4-5V750SF	SF	1/2 - 2-15/16	A	7.40	7.50	7/32	3-1/16	2-1/16	25/32	17.0
4-5V800E	E	7/8 - 3-1/2	B	7.90	8.00	11/32	3-1/16	2-3/4	1/32	18.8
4-5V850E	E	7/8 - 3-1/2	B	8.40	8.50	11/32	3-1/16	2-3/4	1/32	21.9
4-5V900E	E	7/8 - 3-1/2	B	8.90	9.00	11/32	3-1/16	2-3/4	1/32	24.2
4-5V925E	E	7/8 - 3-1/2	B	9.15	9.25	11/32	3-1/16	2-3/4	1/32	25.8
4-5V975E	E	7/8 - 3-1/2	B	9.65	9.75	11/32	3-1/16	2-3/4	1/32	28.2
4-5V1030E	E	7/8 - 3-1/2	B	10.20	10.30	11/32	3-1/16	2-3/4	1/32	29.8
4-5V1090E	E	7/8 - 3-1/2	B	10.80	10.90	11/32	3-1/16	2-3/4	1/32	30.6
4-5V1130E	E	7/8 - 3-1/2	A	11.20	11.30	9/32	3-1/16	2-3/4	1/32	31.9
4-5V1180E	E	7/8 - 3-1/2	B	11.70	11.80	11/32	3-1/16	2-3/4	1/32	33.0
4-5V1250E	E	7/8 - 3-1/2	A	12.40	12.50	9/32	3-1/16	2-3/4	1/32	36.4
4-5V1320E	E	7/8 - 3-1/2	A	13.10	13.20	9/32	3-1/16	2-3/4	1/32	38.2
4-5V1400E	E	7/8 - 3-1/2	A	13.90	14.00	9/32	3-1/16	2-3/4	1/32	40.2
4-5V1500E	E	7/8 - 3-1/2	A	14.90	15.00	9/32	3-1/16	2-3/4	1/32	43.5
4-5V1600E	E	7/8 - 3-1/2	A	15.90	16.00	9/32	3-1/16	2-3/4	1/32	44.6
4-5V1870E	E	7/8 - 3-1/2	A	18.60	18.70	3/32	3-1/16	2-3/4	7/32	53.6
4-5V2120E	E	7/8 - 3-1/2	A	21.10	21.20	3/32	3-1/16	2-3/4	7/32	62.5
4-5V2360F	F	1 - 4	C	23.50	23.60	15/32	3-1/16	3-3/4	7/32	83.5
4-5V2800F	F	1 - 4	C	27.90	28.00	15/32	3-1/16	3-3/4	7/32	126.0
4-5V3150F	F	1 - 4	C	31.40	31.50	15/32	3-1/16	3-3/4	7/32	148.0
4-5V3750F	F	1 - 4	C	37.40	37.50	15/32	3-1/16	3-3/4	7/32	170.0
4-5V5000J	J	1-1/2 - 4-1/2	C	49.90	50.00	3/4	3-1/16	4-5/8	13/16	248.0