
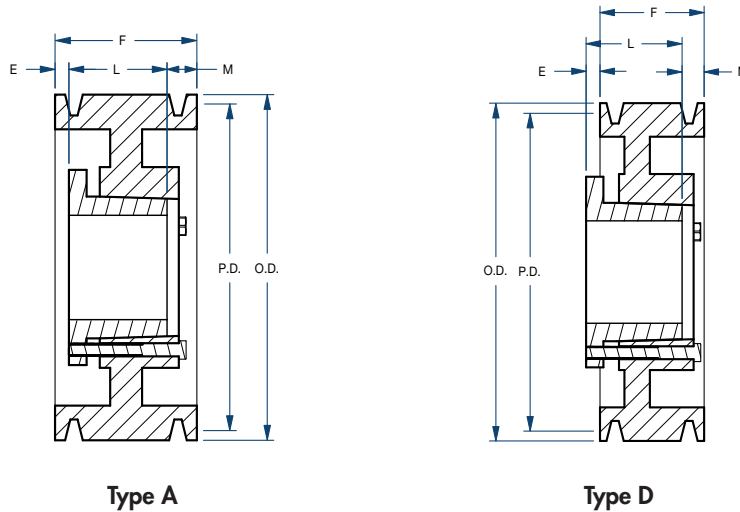


# Sheaves

## 5C/QD STYLE

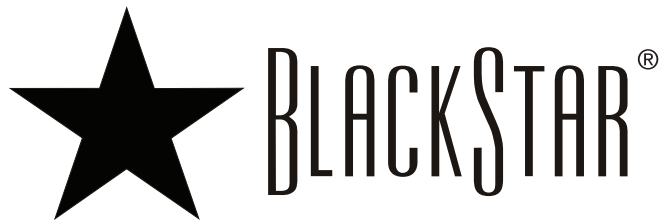

Part No.	Bushing	Bore Range (in)	Type	Diameter (in)		Dimensions (in)				Weight less Bushing (lbs)
				Pitch	Outside	E	F	L	M	
5C60SF	SF	1/2 – 2-15/16	A	6.0	6.40	1-1/32	5-1/4	2-1/16	2-5/32	21.0
5C70SF	SF	1/2 – 2-15/16	A	7.0	7.40	1-1/32	5-1/4	2-1/16	2-5/32	26.0
5C75SF	SF	1/2 – 2-15/16	A	7.5	7.90	1-1/32	5-1/4	2-1/16	2-5/32	28.0
5C80E	E	7/8 – 3-1/2	A	8.0	8.40	1-5/32	5-1/4	2-3/4	1-11/32	33.0
5C85E	E	7/8 – 3-1/2	A	8.5	8.90	1-5/32	5-1/4	2-3/4	1-11/32	37.0
5C90E	E	7/8 – 3-1/2	A	9.0	9.40	1-5/32	5-1/4	2-3/4	1-11/32	40.0
5C95E	E	7/8 – 3-1/2	A	9.5	9.90	1-5/32	5-1/4	2-3/4	1-11/32	42.0
5C100E	E	7/8 – 3-1/2	A	10.0	10.40	1-5/32	5-1/4	2-3/4	1-11/32	45.0
5C105E	E	7/8 – 3-1/2	A	10.5	10.90	1-5/32	5-1/4	2-3/4	1-11/32	47.0
5C110E	E	7/8 – 3-1/2	A	11.0	11.40	1-5/32	5-1/4	2-3/4	1-11/32	50.0
5C120E	E	7/8 – 3-1/2	A	12.0	12.40	1-5/32	5-1/4	2-3/4	1-11/32	53.0
5C130E	E	7/8 – 3-1/2	A	13.0	13.40	1-5/32	5-1/4	2-3/4	1-11/32	58.0
5C140E	E	7/8 – 3-1/2	A	14.0	14.40	1-5/32	5-1/4	2-3/4	1-11/32	64.0
5C160E	E	7/8 – 3-1/2	A	16.0	16.40	1-5/32	5-1/4	2-3/4	1-11/32	73.0
5C180E	E	7/8 – 3-1/2	A	18.0	18.40	1-5/32	5-1/4	2-3/4	1-11/32	85.0
5C200F	F	1 – 4	D	20.0	20.40	3/32	5-1/4	3-3/4	1-19/32	98.0
5C240F	F	1 – 4	D	24.0	24.40	3/32	5-1/4	3-3/4	1-19/32	119.0
5C270F	F	1 – 4	D	27.0	27.40	3/32	5-1/4	3-3/4	1-19/32	153.0
5C300F	F	1 – 4	D	30.0	30.40	3/32	5-1/4	3-3/4	1-19/32	174.0
5C360J	J	1-1/2 – 4-1/2	A	36.0	36.40	1/16	5-1/4	4-5/8	9/16	206.0
5C440J	J	1-1/2 – 4-1/2	A	44.0	44.40	1/16	5-1/4	4-5/8	9/16	254.0
5C500J	J	1-1/2 – 4-1/2	A	50.0	50.40	1/16	5-1/4	4-5/8	9/16	274.0