



Grid Couplings



BLACKSTAR®

T20 CLOSE COUPLED- VERTICAL SPLIT COVER

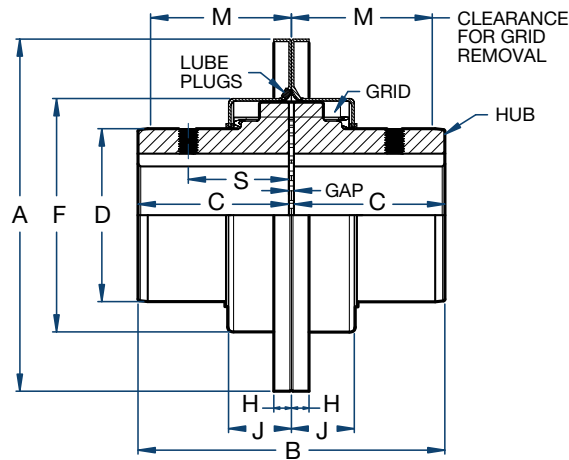

Size	Torque Rating (in/lbs)	Allowable Speed (RPM)	Max. Bore (in)	Min. Bore (in)	Coupling Wt. Without Bore (lbs)	Lube Wt. (lbs)	Dimensions (in)										Gap (in)
							A	B	C	D	F	H	J	M	s		
1020T	460	6,000	1.125	0.500	4.3	0.06	4.42	3.88	1.88	1.56	2.50	0.38	0.94	1.88	1.54	0.125	
1030T	1320	6,000	1.375	0.500	5.7	0.09	4.80	3.88	1.88	1.94	2.88	0.38	0.98	1.88	1.54	0.125	
1040T	2200	6,000	1.625	0.500	7.4	0.12	5.11	4.12	2.00	2.25	3.25	0.38	1.02	2.00	1.58	0.125	
1050T	3850	6,000	1.875	0.500	12.0	0.15	5.86	4.88	2.38	2.62	3.88	0.47	1.20	2.38	1.76	0.125	
1060T	6050	6,000	2.125	0.750	15.0	0.19	6.42	5.12	2.50	3.00	4.38	0.50	1.25	2.50	2.06	0.125	
1070T	8800	5,500	2.500	0.750	23.0	0.25	6.86	6.12	3.00	3.44	4.88	0.50	1.32	2.62	2.12	0.125	
1080T	18,150	4,750	3.000	1.062	39.0	0.38	7.92	7.12	3.50	4.12	5.88	0.50	1.72	3.50	2.54	0.125	
1090T	33,000	4,000	3.500	1.062	56.0	0.56	9.17	7.88	3.88	4.88	6.62	0.50	1.85	3.75	2.82	0.125	
1100T	55,550	3,600	4.000	1.625	93.0	0.84	10.55	9.69	4.75	5.59	7.75	0.62	2.35	4.75	—	0.188	
1110T	82,500	3,000	4.500	1.625	120.0	1.12	11.30	10.19	5.00	6.31	8.50	0.63	2.47	4.88	—	0.188	
1120T	121,000	2,700	5.000	2.375	180.0	1.62	12.61	12.00	5.88	7.06	9.62	0.69	2.90	5.62	—	0.250	
1130T	176,000	2,400	6.000	2.625	270.0	2.00	14.92	13.00	6.38	8.56	11.12	0.81	2.95	5.75	—	0.250	
1140T	253,000	2,200	7.250	2.625	397.0	2.50	16.42	14.75	7.25	10.00	12.62	0.81	3.08	6.12	—	0.250	
1150T	352,000	2,000	8.000	4.250	507.0	4.30	18.75	14.65	7.20	10.60	14.72	0.76	4.21	8.00	—	0.250	
1160T	495,000	1,750	9.000	4.750	708.0	6.20	21.00	15.85	7.80	12.00	16.68	1.18	4.50	8.50	—	0.250	
1170T	660,000	1,600	10.000	5.250	988.0	7.70	23.00	17.25	8.50	14.00	18.68	1.18	4.70	8.90	—	0.250	