




SUPER HEAVY

SH

Super Heavy Riveted Single Strand Chain

(All dimensions listed in inches)

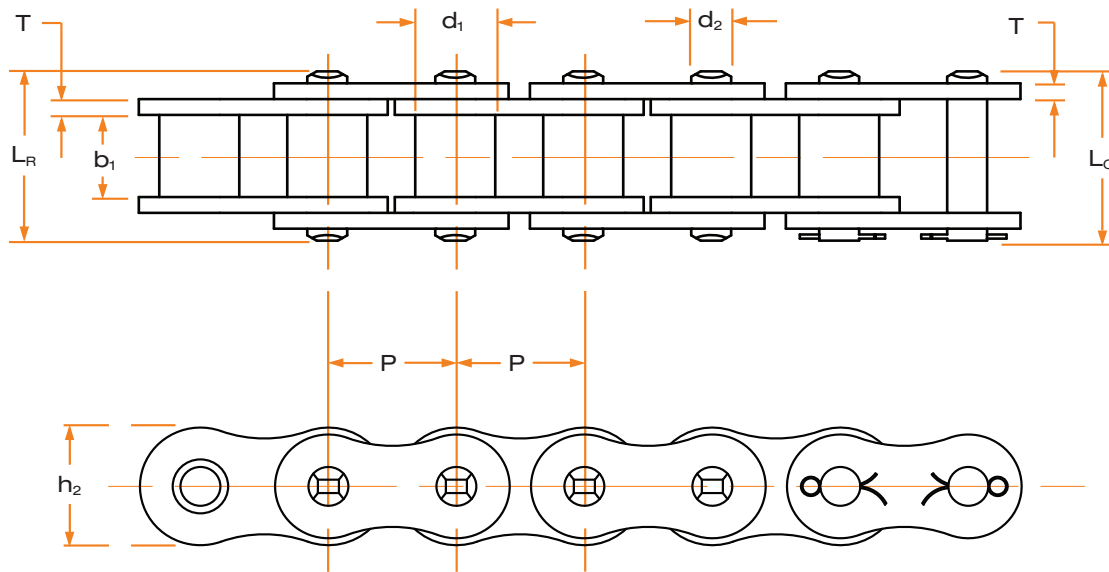

Chain Number	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Min. Ultimate Tensile Strength (lbs)	Average Tensile Strength (lbs)	Max Working Load (lbs)	Weight per Foot (lbs/ft)
	P	d ₁ max	b ₁ min	d ₂ max	L _r max	L _c max	h ₂ max	T max				
SH60H RIV	0.750	0.469	0.500	0.234	1.15	1.24	0.71	0.125	10,023	11,330	2,826	1.3
SH80H RIV	1.000	0.625	0.625	0.312	1.43	1.48	0.95	0.157	20,045	20,906	5,292	2.1
SH100H RIV	1.250	0.750	0.750	0.375	1.72	1.85	1.18	0.189	26,500	29,022	6,864	3.0
SH120H RIV	1.500	0.875	1.000	0.437	2.11	2.26	1.41	0.220	35,954	39,407	9,568	4.4
SH140H RIV	1.750	1.000	1.000	0.500	2.27	2.45	1.61	0.252	46,818	59,909	11,049	5.6
SH160H RIV	2.000	1.125	1.250	0.562	2.69	2.87	1.88	0.283	62,273	65,866	14,820	6.9
SH200H RIV	2.500	1.562	1.500	0.781	3.41	3.68	2.36	0.374	115,023	126,405	24,845	12.9

Use only connecting links that are specifically designed for use with SH Series chain.