




EXTREME DUTY

XD[®]

XD Riveted Single Strand Chain

(All dimensions listed in inches)

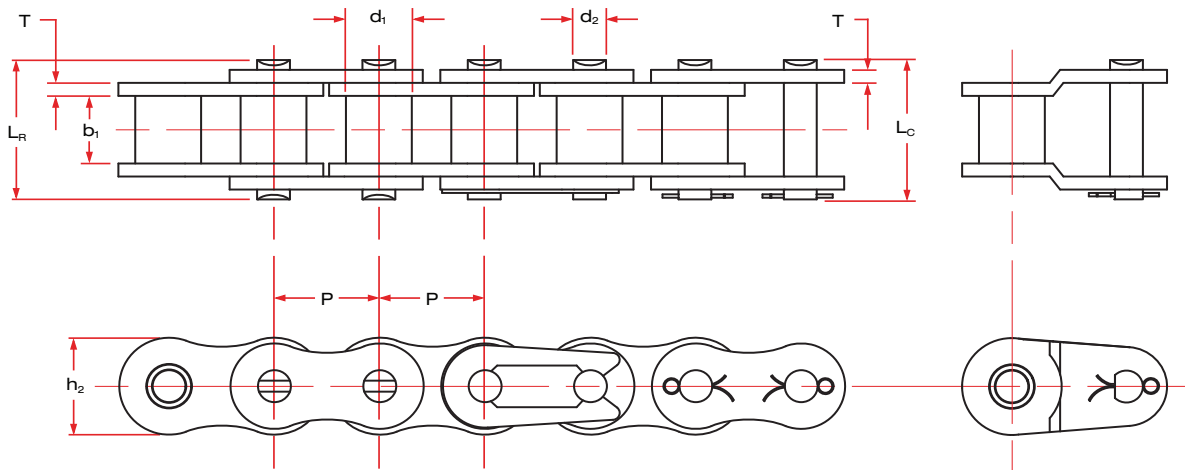

Chain Number	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Min. Ultimate Tensile Strength (lbs)	Average Tensile Strength (lbs)	Max Working Load (lbs)	Weight per Foot (lbs/ft)
	P	d ₁ max	b ₁ min	d ₂ max	L _r max	L _c max	h ₂ max	T max				
XD25 RIV*	0.250	0.130	0.126	0.091	0.46	0.31	0.230	0.030	881	1,058	154	0.087
XD35 RIV*	0.375	0.200	0.189	0.141	0.50	0.46	0.355	0.049	2,203	2,602	419	0.242
XD41 RIV*	0.500	0.306	0.252	0.141	0.58	0.52	0.382	0.049	2,033	2,403	463	0.273
XD40 RIV	0.500	0.312	0.313	0.156	0.63	0.72	0.47	0.059	3,527	4,290	860	0.4
XD50 RIV	0.625	0.400	0.376	0.200	0.80	0.89	0.59	0.079	5,952	7,160	1,389	0.7
XD60 RIV	0.750	0.469	0.500	0.234	1.00	1.10	0.71	0.094	8,487	9,920	2,094	1.1
XD80 RIV	1.000	0.625	0.626	0.313	1.29	1.49	0.95	0.126	15,872	17,630	3,637	1.9
XD100 RIV	1.250	0.750	0.754	0.375	1.57	1.77	1.19	0.157	23,809	26,450	5,511	2.8
XD120 RIV	1.500	0.875	1.006	0.437	1.97	2.19	1.43	0.189	33,288	37,030	7,275	4.2
XD140 RIV	1.750	1.000	1.004	0.500	2.13	2.40	1.66	0.220	42,988	48,720	9,700	5.2
XD160 RIV	2.000	1.125	1.262	0.563	2.48	2.82	1.90	0.252	56,215	60,180	12,125	6.7
XD180 RIV	2.250	1.407	1.407	0.688	3.12	3.22	2.14	0.284	70,544	73,630	14,112	9.0
XD200 RIV	2.500	1.562	1.512	0.781	3.06	3.50	2.37	0.315	94,794	101,410	15,872	11.1
XD240 RIV	3.000	1.875	1.902	0.937	3.72	4.20	2.85	0.374	139,986	149,910	21,825	16.7

*Rollerless