




EXTREME DUTY



## XD Riveted Double Strand Chain

(All dimensions listed in inches)

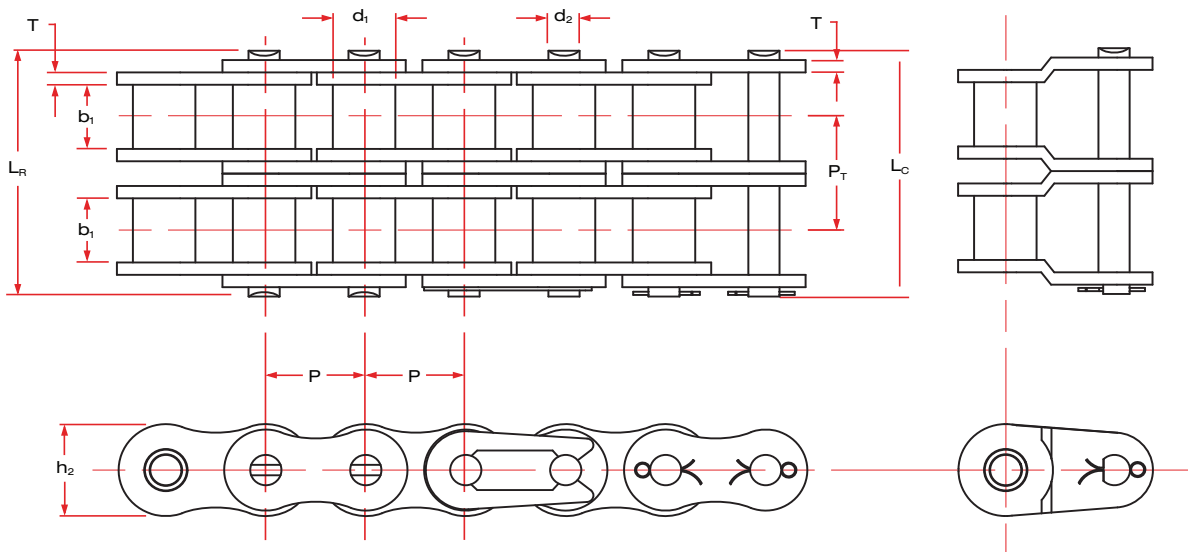

Chain Number	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Min. Ultimate Tensile Strength (lbs)	Average Tensile Strength (lbs)	Max Working Load (lbs)	Weight per Foot (lbs/ft)
	P	$d_1$ max	$b_1$ min	$d_2$ max	$L_r$ max	$L_c$ max	$h_2$ max	T max	$P_T$				
XD25-2 RIV*	0.250	0.130	0.126	0.091	0.59	0.56	0.23	0.030	0.25	1,762	2,117	154	0.18
XD35-2 RIV*	0.375	0.200	0.189	0.141	0.90	0.86	0.35	0.049	0.39	4,405	5,204	706	0.47
XD40-2 RIV	0.500	0.312	0.312	0.156	1.20	1.29	0.47	0.059	0.57	7,054	8,590	1,462	0.9
XD50-2 RIV	0.625	0.400	0.375	0.200	1.51	1.60	0.59	0.079	0.71	11,904	14,330	2,361	1.4
XD60-2 RIV	0.750	0.469	0.500	0.234	1.90	2.00	0.71	0.094	0.90	16,975	19,840	3,560	2.1
XD80-2 RIV	1.000	0.625	0.625	0.313	2.45	2.63	0.95	0.126	1.15	31,745	35,270	6,184	3.8
XD100-2 RIV	1.250	0.750	0.750	0.375	2.98	3.18	1.19	0.157	1.41	47,617	52,900	9,369	5.6
XD120-2 RIV	1.500	0.875	1.000	0.437	3.76	3.98	1.43	0.189	1.79	66,576	74,070	12,367	8.2
XD140-2 RIV	1.750	1.000	1.000	0.500	4.06	4.33	1.66	0.220	1.93	85,976	97,440	16,490	10.2
XD160-2 RIV	2.000	1.125	1.262	0.563	4.78	5.12	1.90	0.252	2.30	112,430	120,370	20,612	13.2
XD180-2 RIV	2.250	1.407	1.407	0.688	5.71	5.81	2.14	0.284	2.59	141,088	147,260	23,990	17.7
XD200-2 RIV	2.500	1.562	1.512	0.781	5.88	6.31	2.37	0.315	2.82	189,587	202,820	26,983	21.8
XD240-2 RIV	3.000	1.875	1.902	0.937	7.17	7.66	2.85	0.374	3.46	279,972	299,820	37,102	32.9

\*Rollerless; By special order only.