




EXTREME DUTY

**XD**<sup>®</sup>

## XD Riveted Triple Strand Chain

(All dimensions listed in inches)

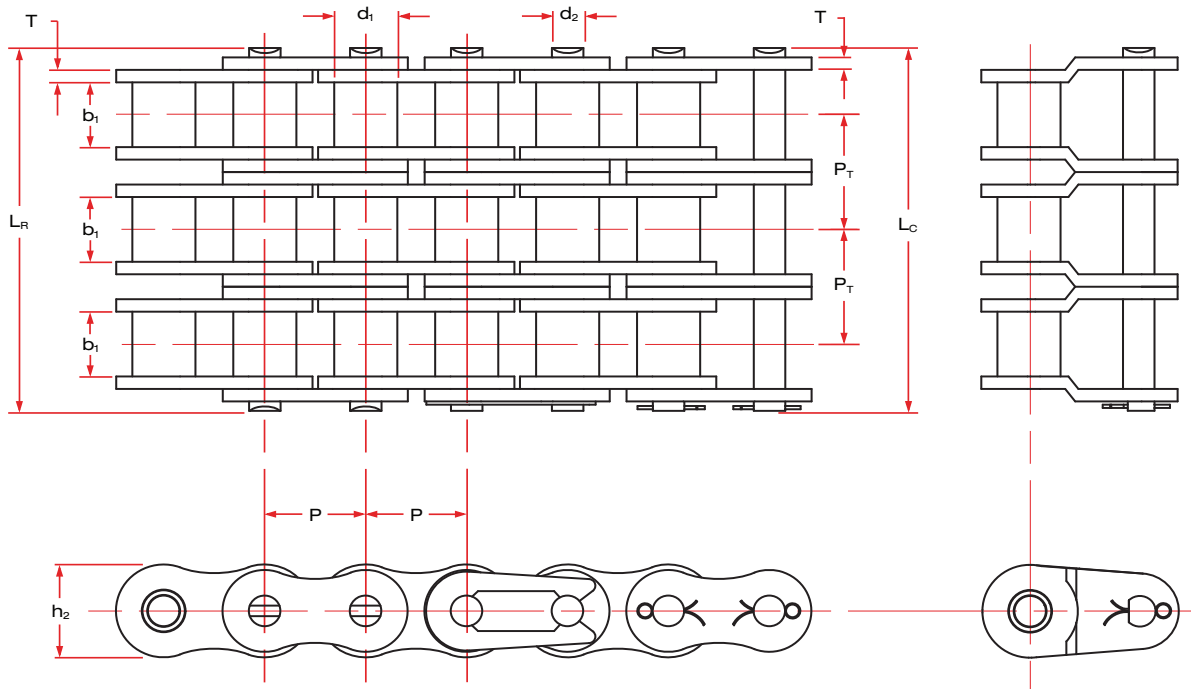

Chain Number	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Min. Ultimate Tensile Strength (lbs)	Average Tensile Strength (lbs)	Max Working Load (lbs)	Weight per Foot (lbs/ft)
	P	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L <sub>r</sub> max	L <sub>c</sub> max	h <sub>2</sub> max	T max	P <sub>T</sub>				
XD35-3 RIV*	0.375	0.200	0.189	0.141	1.31	1.26	0.35	0.049	0.39	6,608	7,806	1,036	0.7
XD40-3 RIV	0.500	0.312	0.312	0.156	1.77	1.86	0.47	0.059	0.57	10,582	12,880	2,149	1.3
XD50-3 RIV	0.625	0.400	0.375	0.200	2.23	2.31	0.59	0.079	0.71	17,856	21,400	3,472	2.1
XD60-3 RIV	0.750	0.469	0.500	0.234	2.80	2.89	0.71	0.094	0.90	25,462	29,760	5,236	3.1
XD80-3 RIV	1.000	0.625	0.625	0.313	3.60	3.79	0.95	0.126	1.15	47,617	52,900	9,094	5.6
XD100-3 RIV	1.250	0.750	0.750	0.375	4.39	4.59	1.19	0.157	1.41	71,426	79,360	13,778	8.4
XD120-3 RIV	1.500	0.875	1.000	0.437	5.55	5.76	1.43	0.189	1.79	99,864	111,110	18,187	12.3
XD140-3 RIV	1.750	1.000	1.000	0.500	5.99	6.25	1.66	0.220	1.93	128,963	146,160	24,250	15.2
XD160-3 RIV	2.000	1.125	1.262	0.563	7.08	7.42	1.90	0.252	2.30	168,644	180,550	30,312	19.7
XD180-3 RIV	2.250	1.407	1.407	0.688	8.31	8.40	2.14	0.284	2.59	211,632	220,900	35,280	25.5
XD200-3 RIV	2.500	1.562	1.512	0.781	8.70	9.13	2.37	0.315	2.82	284,381	304,230	39,681	32.7
XD240-3 RIV	3.000	1.875	1.902	0.937	10.63	11.11	2.85	0.374	3.46	419,957	449,740	54,561	49.1

\*Rollerless; By special order only.