


TYPE J FLANGES

SolarFlex Coupling Flanges

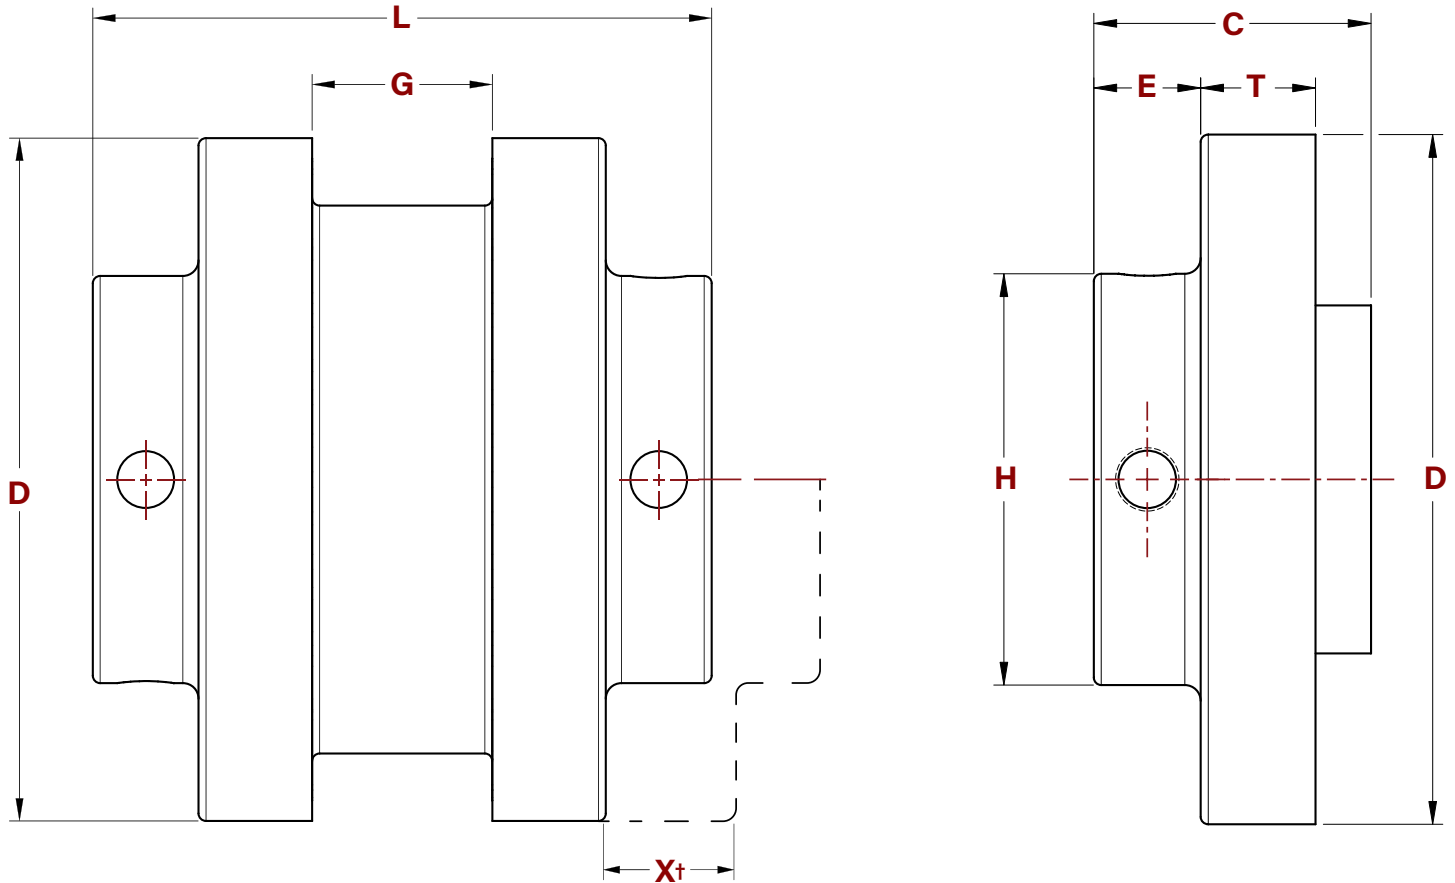

Coupling Size	Dimensions (in)								Wt. (lbs) *	Finished Bore Sizes ** (in)	Max. Bore
	C	D	E	G	H	L	T	X			
3J	0.813	2.062	0.438	0.375	1.250	2.000	0.375	0.563	0.3	0.500 0.625	0.750
4J	0.875	2.460	0.438	0.625	1.625	2.375	0.438	0.750	0.5	0.500 0.625 0.750 0.875 1.000	1.000
5J	0.688	3.250	0.469	0.750	1.875	2.875	0.594	0.969	0.9	0.500 0.625 0.750 0.875 1.000 1.125	1.125
6J	0.531	4.000	0.594	0.875	1.938	3.313	0.625	1.094	1.7	0.625 0.750 0.875 1.000	----
	0.531	4.000	0.594	0.875	2.500	3.313	0.625	1.094	1.7	1.125 1.375	1.375

* Approximate weight for each flange.

** J flanges can be rebored if necessary.

† Minimum space required to remove sleeve.