


TYPE S FLANGES

SolarFlex Coupling Flanges

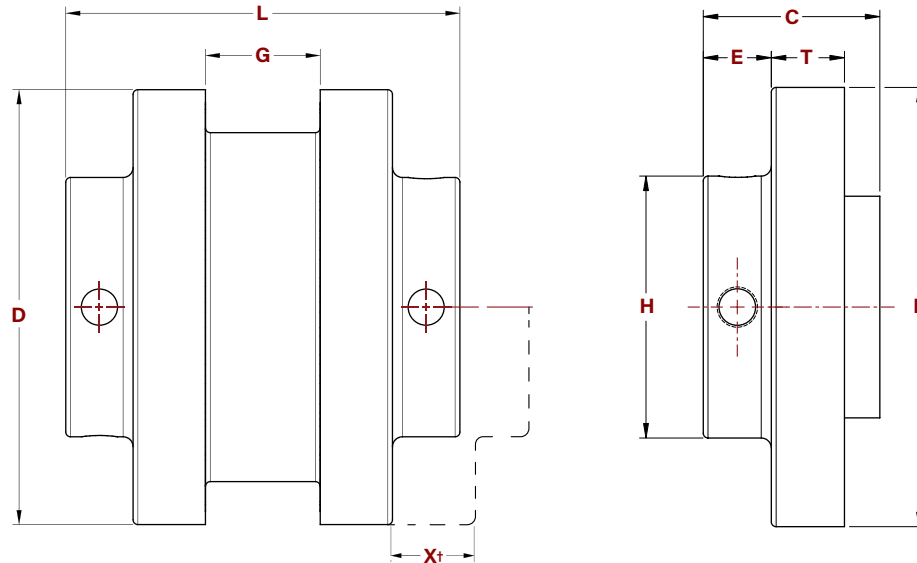

Coupling Size	Dimensions (in)											Weight (lbs) ***
	Flange Diameter (D)	Bore			Hub			G	L	T	X†	
		Stock	Rec. Max. *	Rec. Max. **	Hub Diameter (H)	Length Thru (C)	Hub Projected (E)					
5S	3.250	0.500	1.188	1.250	1.875	1.375	0.453	0.750	2.813	0.594	0.969	1.0
6S	4.000	0.625	1.438	1.500	2.500	1.625	0.531	0.875	3.500	0.750	1.094	2.1
	4.000	0.625	----	1.875	2.500	1.563	0.813	0.875	4.000	0.750	1.094	2.1
7S	4.625	0.625	1.625	1.875	2.813	1.844	0.688	1.000	3.938	0.781	1.313	2.7
8S	5.450	0.750	1.938	2.250	3.250	0.719	0.750	1.125	4.438	0.906	1.500	4.5
	5.450	0.750	----	2.375	3.250	1.938	1.031	1.125	5.000	0.906	1.500	4.5
9S	6.350	0.875	2.375	2.500	3.625	2.406	0.781	1.438	5.063	1.031	1.750	6.5
	6.350	0.875	----	2.875	4.125	2.281	1.250	1.438	6.000	1.031	1.750	6.5
10S	7.500	1.125	2.750	3.125	4.375	2.719	0.813	1.625	5.688	1.219	2.000	11.3
	7.500	1.125	----	3.375	4.750	2.688	1.469	1.625	7.000	1.219	2.000	11.3
11S	8.625	1.250	3.375	3.625	5.250	3.438	1.125	1.875	7.125	1.500	2.375	17.6
	8.625	1.250	----	3.875	5.625	3.063	1.563	1.875	8.000	1.500	2.375	17.6
12S	10.000	1.500	3.875	3.938	5.750	4.000	0.594	2.313	8.250	1.688	2.688	27.2

*Recommended max. bore with standard keyway.

** Recommended max. bore with shallow keyway.

*** Approximate weight for each flange.

† Minimum space required to remove sleeve.

Coupling Size	Finished Bore Sizes (in)										
5S	.625, .750, .813, .875, .938, 1.000, 1.063, 1.125, 1.188, 1.250										
6S	.750, .875, .938, 1.000, 1.063, 1.125, 1.188, 1.250, 1.313, 1.375, 1.438, 1.500, 1.625, 1.750, 1.875										
7S	.750, .875, .938, 1.000, 1.063, 1.125, 1.188, 1.250, 1.313, 1.375, 1.438, 1.500, 1.563, 1.625, 1.688, 1.750, 1.875										
8S	.875, .938, 1.000, 1.063, 1.125, 1.188, 1.250, 1.313, 1.375, 1.438, 1.500, 1.563, 1.625, 1.688, 1.750, 1.875, 1.938, 2.063, 2.125, 2.375										
9S	.938, 1.000, 1.063, 1.125, 1.250, 1.375, 1.438, 1.500, 1.563, 1.625, 1.688, 1.750, 1.875, 1.938, 2.063, 2.125, 2.188, 2.375, 2.500, 2.875										
10S	1.125, 1.250, 1.375, 1.438, 1.500, 1.563, 1.625, 1.688, 1.750, 1.875, 1.938, 2.063, 2.125, 2.188, 2.250, 2.375, 2.438, 2.500, 2.750, 2.875, 3.375										
11S	1.250, 1.375, 1.438, 1.563, 1.625, 1.750, 1.875, 2.063, 2.125, 2.250, 2.375, 2.625, 2.750, 2.875, 3.375, 3.875										
12S	1.875, 2.125, 2.375, 2.625, 2.875, 3.375, 3.875, 3.938										