





# SB 200 AND CSB 200 SERIES

Light-Duty Ball Bearing  
Setscrew Lock

# TURNER

Mounted Bearings

Available Seal Style:

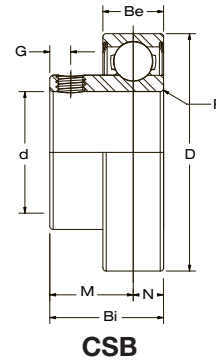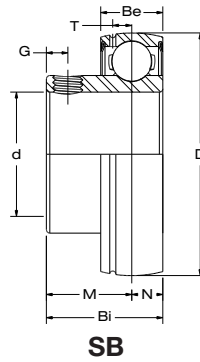

Bearing Insert		Shaft Dia. d in. mm.	Setscrew Used in. mm.	Dimensions in. mm.							Load Rating lbs. kN.		Weight lbs. kg.
				D	Bi	Be	N	M	G	T	Dynamic C <sub>r</sub>	Static C <sub>0r</sub>	
SB 201	CSB 201	12	M5 x 0.8	1.5748 40.0	0.8661 22.0	0.4724 12.0	0.2362 6.0	0.6299 16.0	0.1929 4.9	0.1378 3.5	2,147 9.55	1,075 4.78	0.2 0.1
SB 201-8	CSB 201-8	1/2	10-32										
SB 202	CSB 202	15	M5 x 0.8										
SB 202-10	CSB 202-10	5/8	10-32	1.8504 47.0	0.9843 25.0	0.5512 14.0	0.2756 7.0	0.7087 18.0	0.1969 5.0	0.1575 4.0	2,883 12.82	1,496 6.65	0.3 0.1
SB 203	CSB 203	17	M5 x 0.8										
SB 204-12	CSB 204-12	3/4	1/4-28										
SB 204	CSB 204	20	M6 x 1	2.0472 52.0	1.0630 27.0	0.5906 15.0	0.2953 7.5	0.7677 19.5	0.2165 5.5	0.1693 4.3	3,155 14.04	1,810 8.05	0.4 0.2
SB 205-14	CSB 205-14	7/8	1/4-28										
SB 205-15	CSB 205-15	15/16	1/4-28										
SB 205	CSB 205	25	M6 x 1	2.4409 62.0	1.1811 30.0	0.6299 16.0	0.3150 8.0	0.8661 22.0	0.2323 5.9	0.1929 4.9	4,377 19.47	2,569 11.43	0.6 0.3
SB 205-16	CSB 205-16	1	1/4-28										
SB 206-17	CSB 206-17	1 1/16	1/4-28										
SB 206-18	CSB 206-18	1 1/8	1/4-28	2.8346 72.0	1.2598 32.0	0.6693 17.0	0.3346 8.5	0.9252 23.5	0.3150 8.0	0.2165 5.5	5,775 25.69	3,497 15.56	0.9 0.4
SB 206	CSB 206	30	M6 x 1										
SB 206-19	CSB 206-19	1 3/16	1/4-28										
SB 206-20	CSB 206-20	1 1/4	1/4-28	3.1496 80.0	1.3386 34.0	0.7087 18.0	0.3543 9.0	0.9843 25.0	0.3150 8.0	0.2362 6.0	6,634 29.51	4,079 18.14	1.3 0.6
SB 207-20	CSB 207-20	1 1/4	5/16-24										
SB 207-21	CSB 207-21	1 15/16	5/16-24										
SB 207-22	CSB 207-22	1 3/8	5/16-24	3.3465 85.0	1.4173 36.0	0.7480 19.0	0.3740 9.5	1.0433 26.5	0.3150 8.0	0.2402 6.1	7,160 31.85	4,676 20.80	1.8 0.8
SB 207	CSB 207	35	M8 x 1										
SB 207-23	CSB 207-23	1 7/16	5/16-24										
SB 208-24	CSB 208-24	1 1/2	5/16-24	3.5433 90.0	1.4961 38.0	0.7870 20.0	0.3937 10.0	1.1023 28.0	0.3937 10.0	0.2598 6.6	7,867 35.00	5,330 23.71	1.8 0.8
SB 208-25	CSB 208-25	1 9/16	5/16-24										
SB 208	CSB 208	40	M8 x 1										
SB 209-26	CSB 209-26	1 5/8	5/16-24	3.9370 100.0	1.5748 40.0	0.8268 21.0	0.4134 10.5	1.1614 29.5	0.3937 10.0	0.2835 7.2	9,743 43.34	6,608 29.40	2.5 1.1
SB 209-27	CSB 209-27	1 11/16	5/16-24										
SB 209-28	CSB 209-28	1 3/4	5/16-24										
SB 209	CSB 209	45	M8 x 1	4.3307 110.0	1.6535 42.0	0.8861 22.0	0.4331 11.0	1.2204 31.0	0.3937 10.0	0.2953 7.5	10,720 47.69	7,516 33.43	3.4 1.6
SB 210-30	CSB 210-30	1 7/8	3/8-24										
SB 210-31	CSB 210-31	1 15/16	3/8-24										
SB 210	CSB 210	50	M10 x 1.25	4.3307 110.0	1.6535 42.0	0.8861 22.0	0.4331 11.0	1.2204 31.0	0.3937 10.0	0.2953 7.5	10,720 47.69	7,516 33.43	3.4 1.6
SB 210-32	CSB 210-32	2	3/8-24										
SB 211-32	CSB 211-32	2	3/8-24										
SB 211-34	CSB 211-34	2 1/8	3/8-24	4.3307 110.0	1.6535 42.0	0.8861 22.0	0.4331 11.0	1.2204 31.0	0.3937 10.0	0.2953 7.5	10,720 47.69	7,516 33.43	3.4 1.6
SB 211	CSB 211	55	M10 x 1.25										
SB 211-35	CSB 211-35	2 3/16	3/8-24										
SB 212-36	CSB 212-36	2 1/4	3/8-24	4.3307 110.0	1.6535 42.0	0.8861 22.0	0.4331 11.0	1.2204 31.0	0.3937 10.0	0.2953 7.5	10,720 47.69	7,516 33.43	3.4 1.6
SB 212	CSB 212	60	M10 x 1.25										
SB 212-38	CSB 212-38	2 3/8	3/8-24										
SB 212-39	CSB 212-39	2 7/16	3/8-24										

**NOTE:** Standard bearing is regreaseable. Non-regreaseable bearings are available upon request.