


Non-Greasable

DISC HARROW BEARINGS

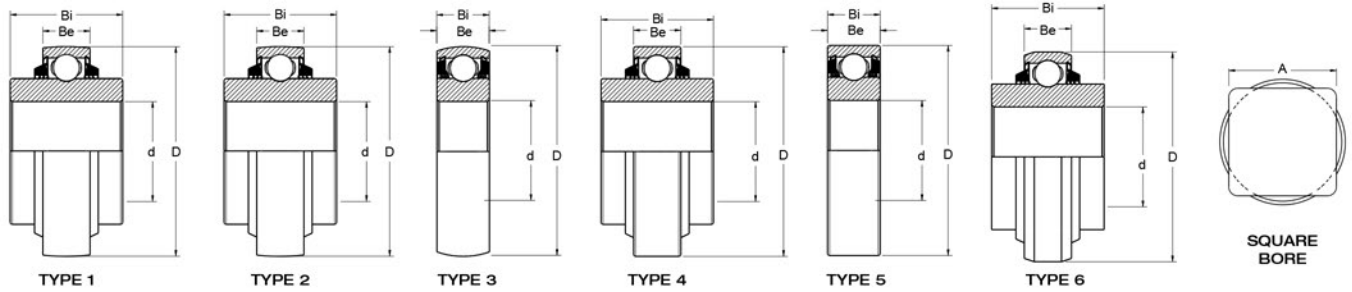

Round Bore Non-Greasable

Part Number	Type	d		D		Be		Bi		Load Ratings		Weight lbs.
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	Dynamic (lbs.)	Static (lbs.)	
W208PPB2	1	1.5005	38.113	3.1496	80.000	0.709	18.00	1.688	42.88	7340	3650	1.59
W208PPB7	2	1.1880	30.175	3.1496	80.000	0.709	18.00	1.188	30.18	7340	3650	1.41
W208PP10	4	1.5005	38.113	3.1496	80.000	0.827	21.00	1.688	42.88	7340	3650	1.50
W208PPB10	1	1.5005	38.113	3.1496	80.000	0.827	21.00	1.688	42.88	7340	3650	1.59
W208PPB23	2	1.5005	38.113	3.1496	80.000	1.188	30.18	1.688	42.88	7340	3650	1.50
W209PPB2	3	1.7717	45.000	3.3460	85.000	1.188	30.18	1.188	30.18	7350	4150	1.45
W209PPB4	3	1.5350	38.989	3.3460	85.000	1.188	30.18	1.188	30.18	7350	4150	1.65
W210PP2	5	1.9380	49.225	3.5433	90.000	1.188	30.18	1.188	30.18	7880	4650	1.69
W210PPB2	3	1.9380	49.225	3.5430	90.000	1.188	30.18	1.188	30.18	7880	4650	1.56
W210PPB5	3	1.7850	45.339	3.5430	90.000	1.188	30.18	1.188	30.18	7880	4650	1.75
W210PP8	5	1.5300	38.862	3.5433	90.000	1.188	30.18	1.188	30.18	7880	4650	1.97
W210PPB9	2	1.9448	49.398	3.5433	90.000	0.906	23.00	1.438	36.52	7880	4650	1.91
W211PP2	5	2.1880	55.575	3.9370	100.000	1.312	33.32	1.312	33.32	9740	5850	2.33
W211PPB2	3	2.1880	55.575	3.9370	100.000	1.312	33.32	1.312	33.32	9740	5850	3.00
W211PPB4	6	2.1880	55.575	3.9370	100.000	1.312	33.32	2.187	55.55	9740	5850	3.63
W214PP2	5	2.7559	70.000	4.9213	125.000	1.562	39.68	1.562	39.68	14000	8800	4.19
W214PPB2	3	2.7559	70.000	4.9213	125.000	1.562	39.68	1.562	39.68	14000	8800	3.96
W214PPB9	3	2.7660	70.256	4.9213	125.000	1.102	28.00	1.750	44.45	14000	8800	3.96

Square Bore Non-Greasable

Part Number	Type	d		A		D		Be		Bi		Load Ratings		Weight lbs.
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	Dynamic (lbs.)	Static (lbs.)	
W208PP5	4	1.1250	28.575	1.1800	30.175	3.1496	80.000	0.709	18.00	1.438	36.52	7340	3650	1.50
W208PPB5	1	1.1250	28.575	1.1800	30.175	3.1496	80.000	0.709	18.00	1.438	36.52	7340	3650	1.47
W208PP6	4	1.0000	25.400	1.0300	26.162	3.1496	80.000	0.709	18.00	1.438	36.52	7340	3650	1.62
W208PPB6	1	1.0000	25.400	1.0300	26.162	3.1496	80.000	0.709	18.00	1.438	36.52	7340	3650	1.59
W208PP8	4	1.1250	28.575	1.1800	30.175	3.1496	80.000	1.188	30.18	1.438	36.52	7340	3650	1.66
W208PPB8	2	1.1250	28.575	1.1800	30.175	3.1496	80.000	1.188	30.18	1.438	36.52	7340	3650	1.66
W208PPB9	2	1.0000	25.400	1.0300	26.162	3.1496	80.000	1.188	30.18	1.438	36.52	7340	3650	1.74
W208PPB11	6	0.8750	22.225	0.9050	22.987	3.3760	85.750	1.188	30.18	1.438	36.52	7340	3650	2.05
W208PPB12	6	1.1250	28.575	1.1800	30.175	3.3760	85.750	1.188	30.18	1.438	36.52	7340	3650	1.62
W208PPB13	1	0.8750	22.225	0.9050	22.987	3.1496	80.000	0.709	18.00	1.438	36.52	7340	3650	1.62
W209PPB5	2	1.2500	31.750	1.2900	32.766	3.3465	85.000	1.188	30.18	1.438	36.52	7350	4150	1.75
W209PPB7	6	1.2500	31.750	1.2900	32.766	3.3760	85.750	1.188	30.18	1.438	36.52	7350	4150	1.80
W210PP4	5	1.1250	28.575	1.1800	30.175	3.5433	90.000	1.188	30.18	1.188	30.18	7880	4650	1.92
W210PPB4	3	1.1250	28.575	1.1800	30.175	3.5433	90.000	1.188	30.18	1.188	30.18	7880	4650	2.11
W210PPB6	2	1.1250	28.575	1.1800	30.175	3.5433	90.000	1.188	30.18	1.438	36.52	7880	4650	2.11
W211PP3	5	1.5000	38.100	1.5311	38.890	3.9370	100.000	1.312	33.32	1.312	33.32	9740	5850	2.79
W211PPB3	3	1.5000	38.100	1.5311	38.890	3.9370	100.000	1.312	33.32	1.312	33.32	9740	5850	2.66
W211PP5	4	1.5000	38.100	1.5311	38.890	4.0000	101.600	1.438	36.52	1.750	44.45	9740	5850	3.38
W211PPB6	6	1.5000	38.100	1.5311	38.890	4.0770	103.556	1.438	36.52	1.750	44.45	9740	5850	4.05