


VMRV-50 Dimensions

Worm Gear Reducer

All dimensions listed in inches

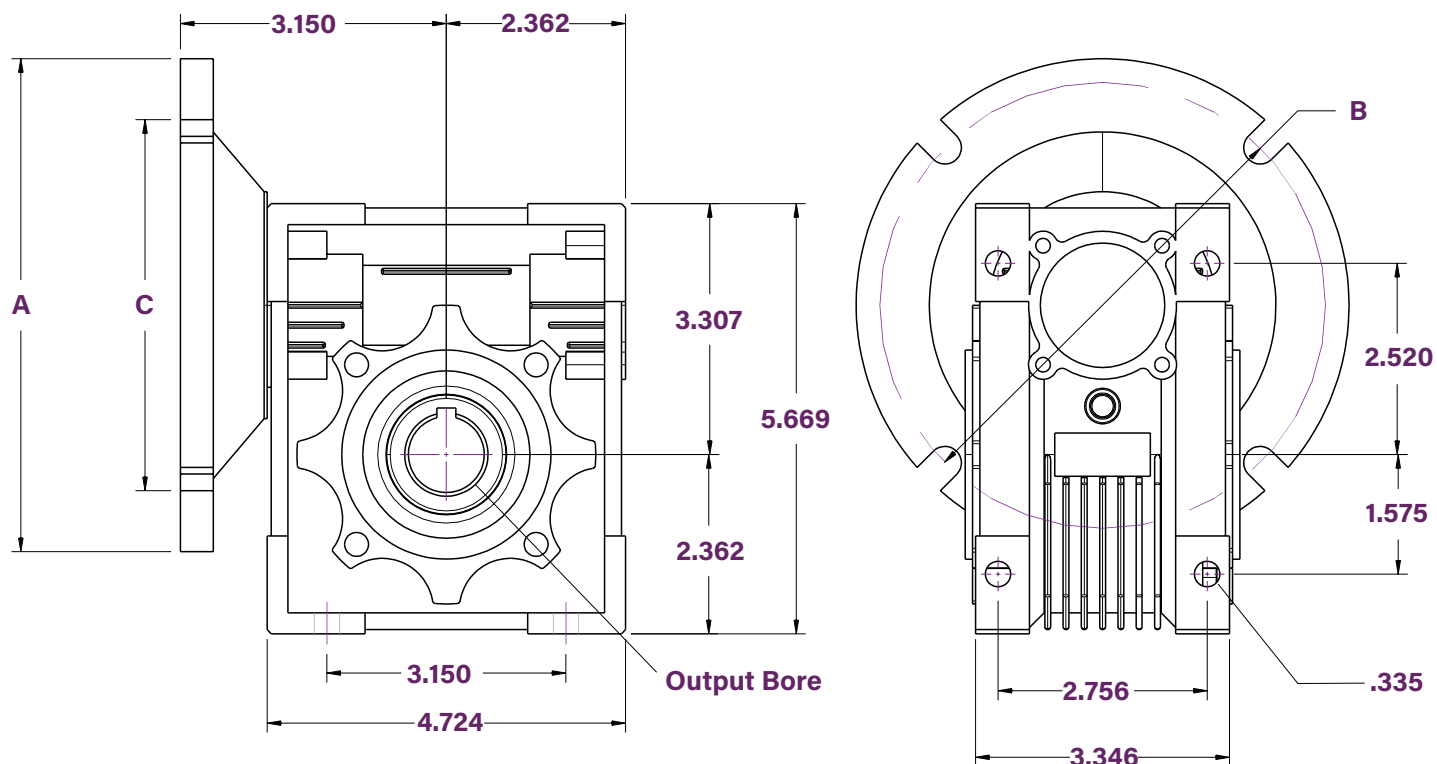

Motor Options & Dimensions

NEMA Frame	Motor Shaft Dia.	A	B	C
		OD Flange	Bolt Circle	Pilot Bore
56C	0.625	6.50	5.88	4.50

Ratios

Nominal Ratios
5:1
7.5:1
10:1
15:1
20:1
25:1
30:1
40:1
50:1
60:1
100:1

Specifications

Center Distance	Weight* (lbs.)	Est. Oil Fill Amount (oz.)
1.968	8.05	5.25

Hollow Output Shaft

Output Bore	Output Keyway
1.000	1/4 x 1/8

Ordering Information

Series	Size	Ratio	NEMA Input
VMRV	50	60	56C

*Reducer weights are approximate and can vary by several pounds depending on flange and ratio options


VMRV-50 Accessories

Worm Gear Reducer

All dimensions listed in inches




Solid Output Shaft Configurations

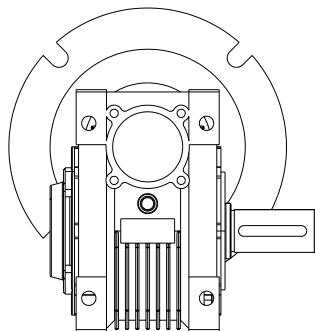


VMRV-50 with OSS & CVR

(Left hand orientation)

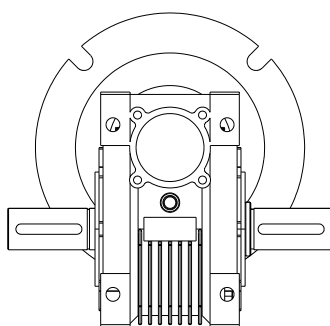


VMRV-50 with OSD



VMRV-50 with OSS & CVR


(Right hand orientation)

Available Accessories

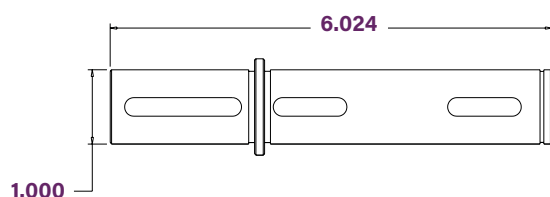


Single Output Shaft

VMRV-50 OSS

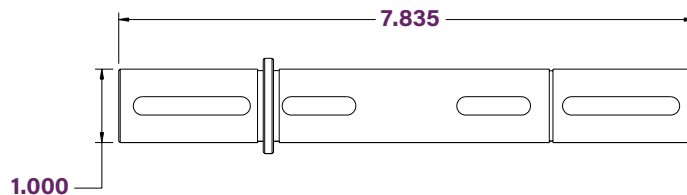


Double Output Shaft

VMRV-50 OSD

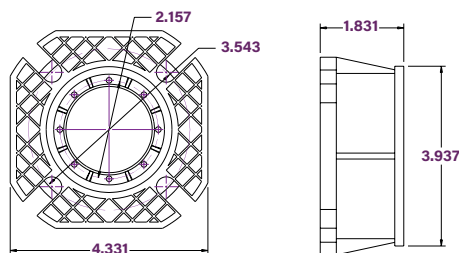


Output Flange

VMRV-50 OSF

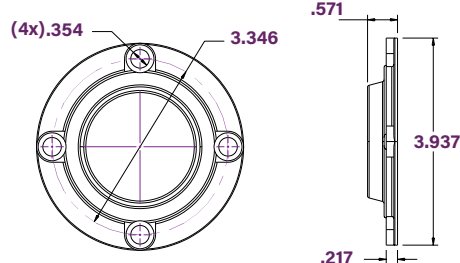

Output Cover

VMRV-50 CVR

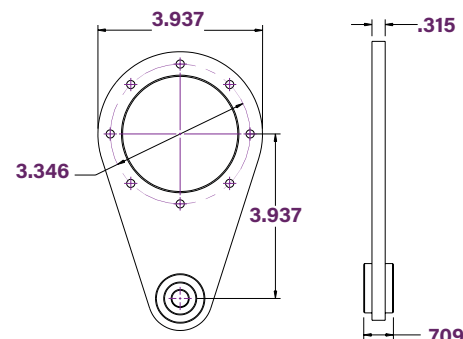

Torque Arm

VMRV-50 TA