


VMRV-63 Dimensions

Worm Gear Reducer

All dimensions listed in inches

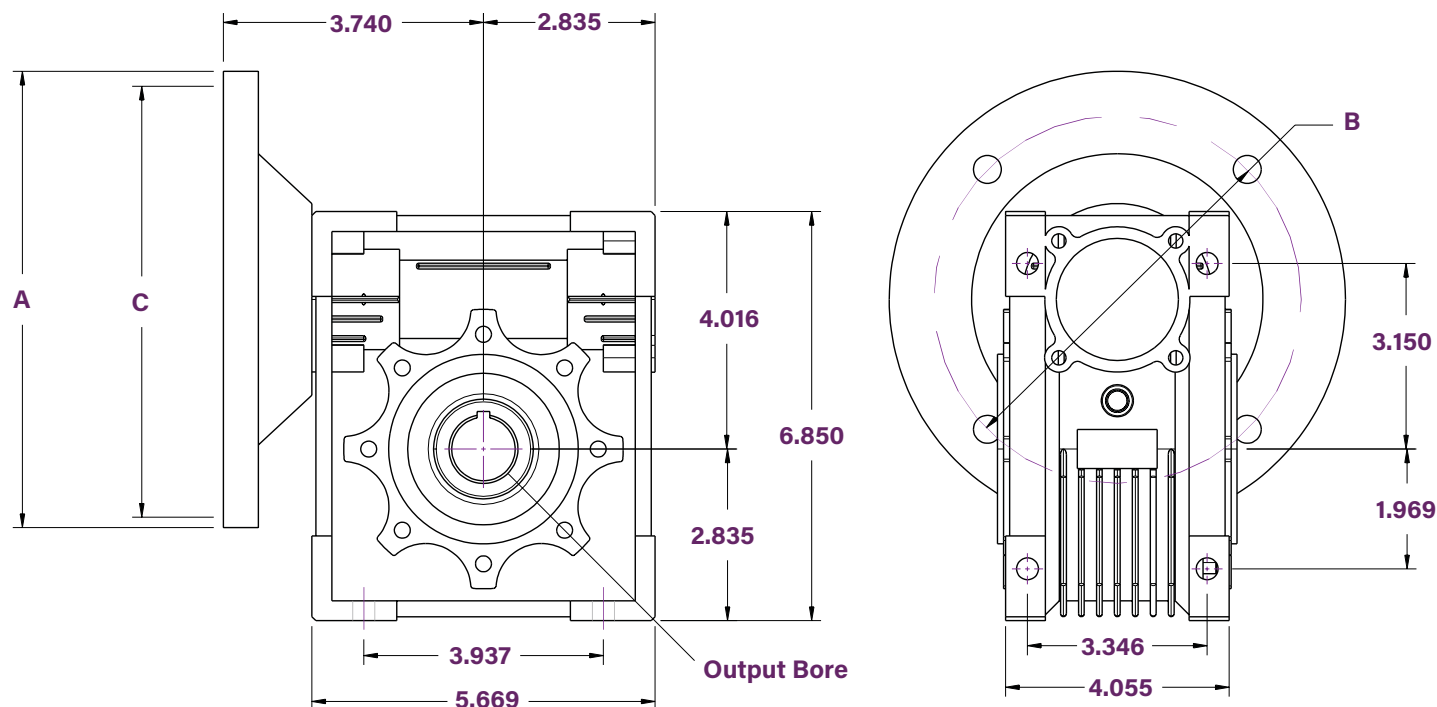

Motor Options & Dimensions

NEMA Frame	Motor Shaft Dia.	A	B	C
		OD Flange	Bolt Circle	Pilot Bore
56C	0.625	6.50	5.88	4.50
140TC	0.875			

Specifications

Center Distance	Weight* (lbs.)	Est. Oil Fill Amount (oz.)
2.480	14.31	10.25

Hollow Output Shaft

Output Bore	Output Keyway
1.125	1/4 x 1/8

Ordering Information

Series	Size	Ratio	NEMA Input
VMRV	63	60	56C

Ratios

Nominal Ratios
5:1
7.5:1
10:1
15:1
20:1
25:1
30:1
40:1
50:1
60:1
100:1

*Reducer weights are approximate and can vary by several pounds depending on flange and ratio options


VMRV-63 Accessories

Worm Gear Reducer

All dimensions listed in inches




Solid Output Shaft Configurations

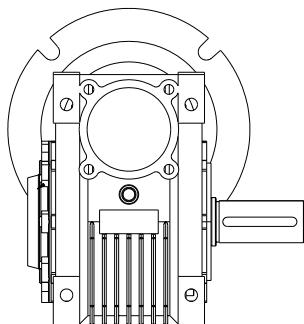


VMRV-63 with OSS & CVR

(Left hand orientation)

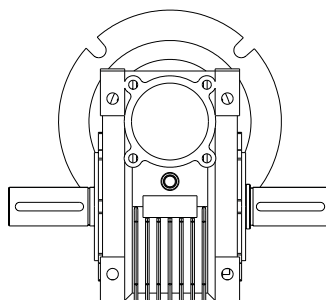


VMRV-63 with OSD

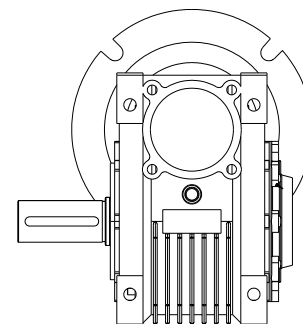

VMRV-63 with OSS & CVR


(Right hand orientation)

Available Accessories

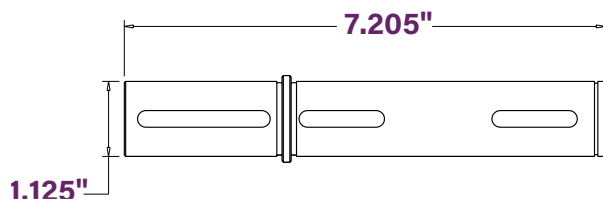


Single Output Shaft

VMRV-63 OSS

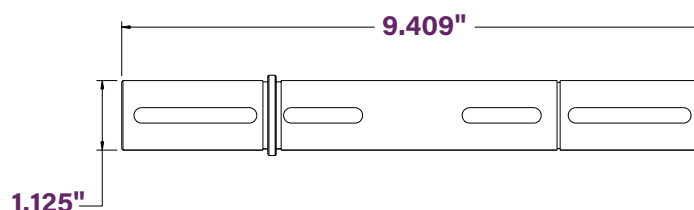


Double Output Shaft

VMRV-63 OSD

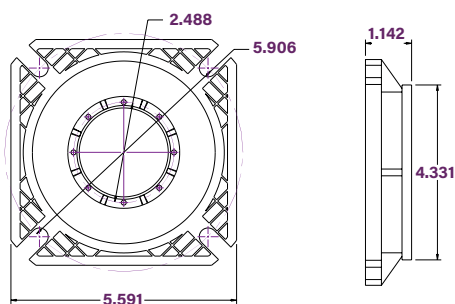


Output Flange

VMRV-63 OSF

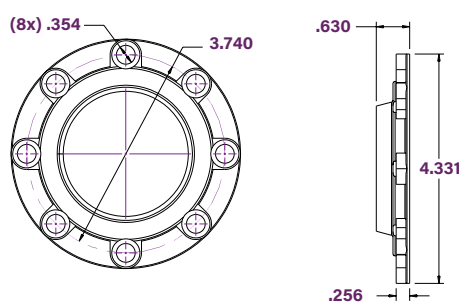

Output Cover

VMRV-63 CVR

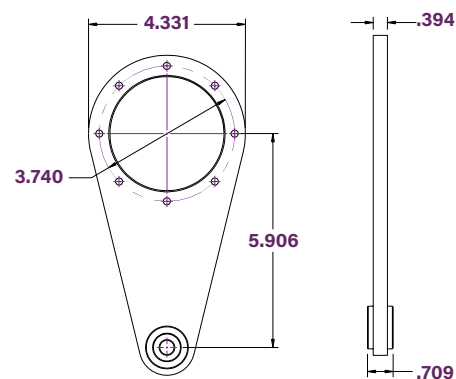

Torque Arm

VMRV-63 TA