


XH237 Dimensions

All dimensions listed in inches

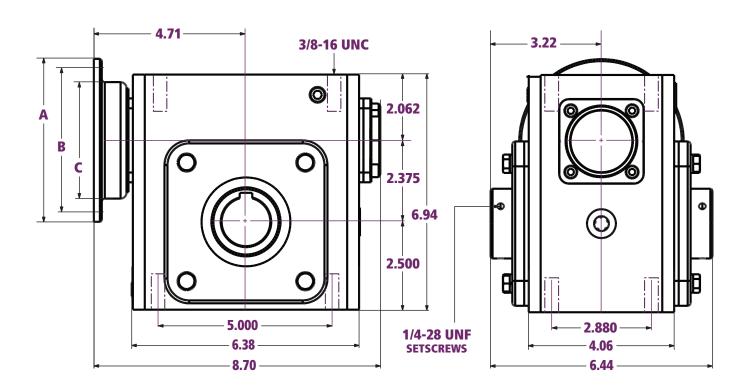

Motor Options & Dimensions (in)

NESSA Motor		A	В	C
NEMA Frame	Shaft Dia. (in)	OD Flange	Bolt Circle	Pilot Bore
56C	0.625	6.50	E 00	4.5
140TC	0.875	6.50	5.88	4.5

Output Bushing Kits

Output Bushing Diameter (in)		
5/8		
3/4		
7/8		
1-1/8		

Output Hollow Bore

Output	Output	
Keyway (in)	Bore (in)	
3/8 x 3/16	1.250	

Ratios

Nominal Ratios	Exact Ratios
5:1	5.3:1
10:1	10.3:1
15:1	15.5:1
20:1	19.5:1
30:1	30.0:1
40:1	40.0:1
50:1	50.0:1
60:1	60.0:1

Efficiency

Nominal Ratios	Efficiency (%)
5:1	≈ 93
10:1	≈ 89
15:1	≈ 84
20:1	≈ 82
30:1	≈ 76
40:1	≈ 71
50:1	≈ 64
60:1	≈ 61


Specifications


Center	Weight	Est. Oil Fill	
Distance (in)	(lbs)	Amount* (oz)	
2.375	37.4	22.0	

^{*}For Position 1

XH237 Accessories

and X237 Base Kit Dimensions

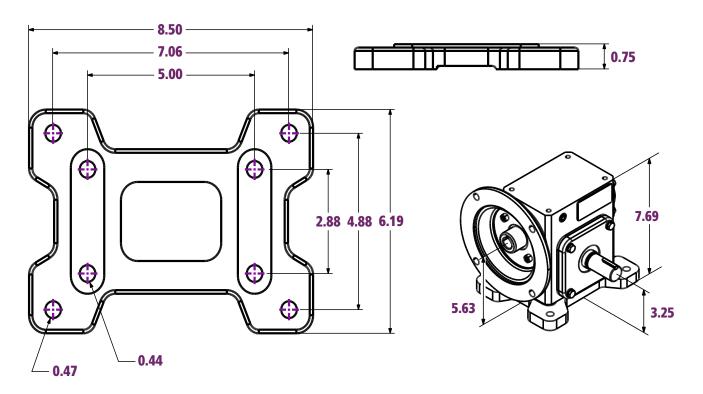




Foot Mounted Base Kit

XBK237




Component Repair Kit

XHRK237



Input Quill Adapter Option

X143-56




Output Bushing Kits*

VH237 (See other page for bore sizes)



Output Bracket Kit*

XOB237



Torque Arm Kit*

XTA237

*Made to order.

