




TESTED TOUGH

HD

Nickel Plated

(All dimensions listed in inches)

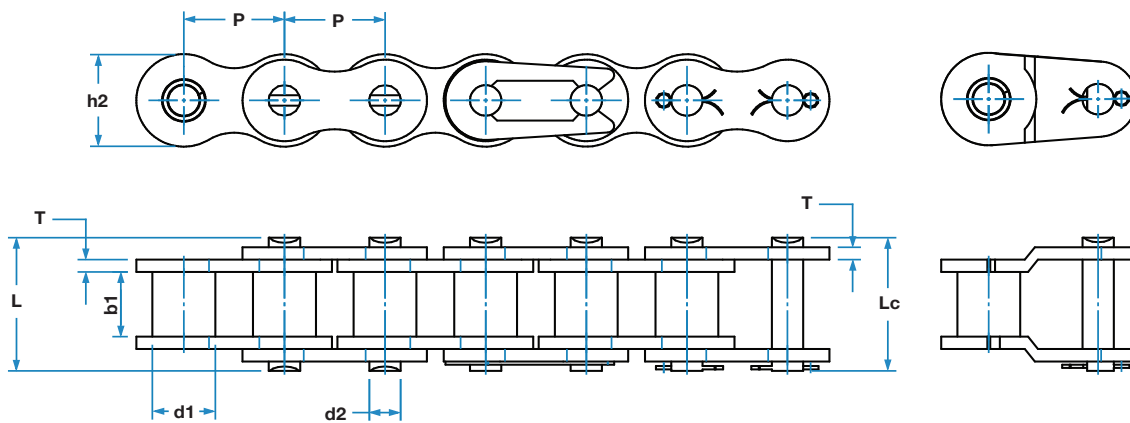

Chain Number	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Min. Ultimate Tensile Strength (lbs)	Max Working Load (lbs)	Weight per Foot (lbs/ft)
	P	d ₁ max	b ₁ min	d ₂ max	L _r max	L _c max	h ₂ max	T max			
HD25 N RIV	0.250	0.130	0.125	0.091	0.31	0.33	0.24	0.030	795	142	0.1
HD35 N RIV	0.375	0.200	0.188	0.141	0.49	0.52	0.35	0.050	1,795	490	0.2
HD41 N RIV	0.500	0.306	0.250	0.141	0.65	0.70	0.39	0.050	1,516	505	0.3
HD40 N RIV	0.500	0.312	0.312	0.156	0.54	0.59	0.47	0.060	3,205	830	0.4
HD50 N RIV	0.625	0.400	0.375	0.200	0.81	0.87	0.59	0.080	5,045	1,478	0.7
HD60 N RIV	0.750	0.469	0.500	0.234	1.02	1.09	0.71	0.094	7,227	2,035	1.0
HD80 N RIV	1.000	0.625	0.625	0.312	1.29	1.38	0.94	0.125	12,886	3,402	1.8
HD100 N RIV	1.250	0.750	0.750	0.375	1.59	1.76	1.18	0.156	20,114	5,222	2.6
HD120 N RIV	1.500	0.875	1.000	0.437	1.98	2.14	1.41	0.187	28,864	7,009	3.8
HD140 N RIV	1.750	1.000	1.000	0.500	2.14	2.32	1.61	0.219	39,182	9,253	5.0
HD160 N RIV	2.000	1.125	1.250	0.562	2.55	2.74	1.88	0.250	51,545	12,268	6.8