




EXTREME DUTY



XD Heavy Riveted Single Strand Chain

(All dimensions listed in inches)

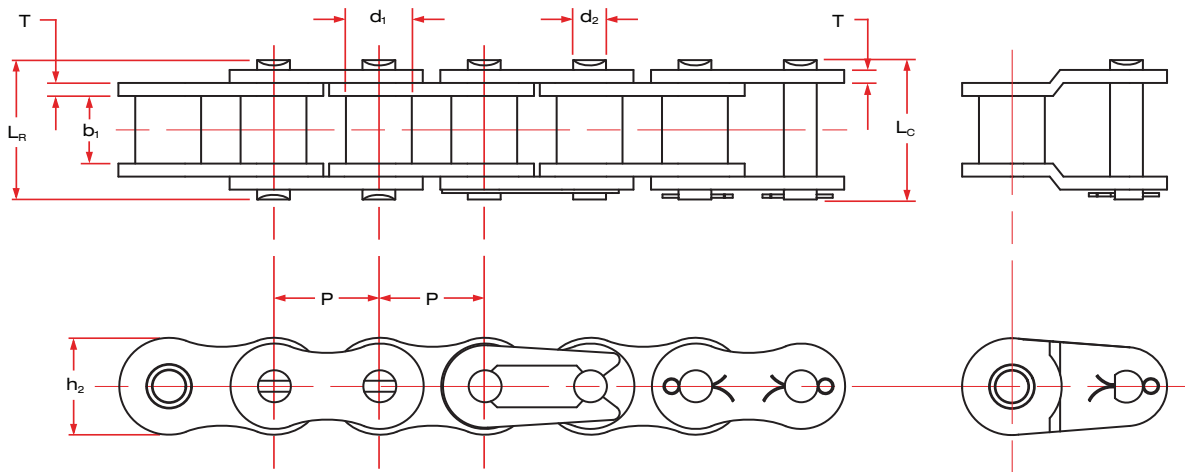

Chain Number	Pitch	Roller Diameter	Width Between Inner Plates		Pin Length		Inner Plate Height	Plate Thickness	Min. Ultimate Tensile Strength (lbs)	Average Tensile Strength (lbs)	Max Working Load (lbs)	Weight per Foot (lbs/ft)
	P		d ₁ max	b ₁ min	d ₂ max	L _r max						
XD60H RIV	0.750	0.469	0.500	0.234	1.13	1.21	0.71	0.126	8,493	9,921	2,424	1.3
XD80H RIV	1.000	0.625	0.625	0.313	1.41	1.55	0.95	0.157	15,877	17,637	3,969	2.1
XD100H RIV	1.250	0.750	0.750	0.375	1.70	1.84	1.19	0.189	23,799	26,455	6,172	3.1
XD120H RIV	1.500	0.875	1.000	0.437	2.11	2.24	1.43	0.220	33,297	37,038	7,935	4.4
XD140H RIV	1.750	1.000	1.000	0.500	2.26	2.45	1.66	0.252	43,000	48,722	10,362	5.6
XD160H RIV	2.000	1.125	1.250	0.563	2.67	2.86	1.90	0.283	56,230	60,186	12,565	7.2
XD200H RIV	2.500	1.562	1.500	0.781	3.40	3.61	2.37	0.374	96,876	103,617	16,314	12.2