


Sheaves



BLACKSTAR®

3V SERIES 2 GROOVE/QD

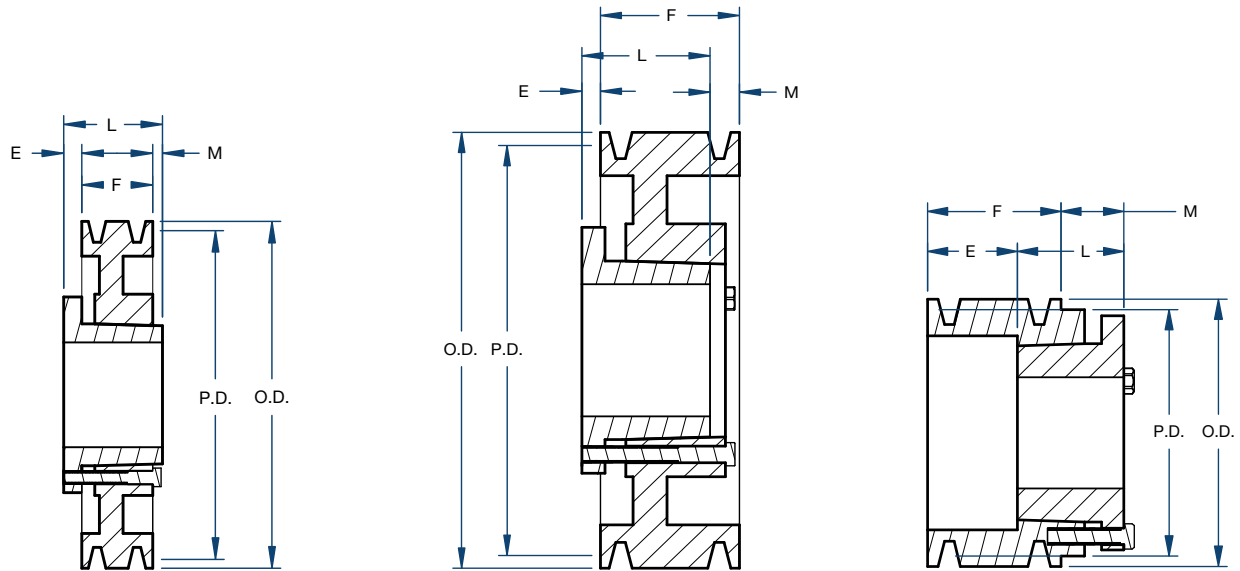

Type C

Type D

Type E

Part Number	Bushing	Bore Range	Type	Diameter (in)		Dimensions (in)				Weight less Bushing (lbs)
				Pitch	Outside	E	F	L	M	
2-3V220JA	JA	1/2 – 1-1/4	E	2.15	2.20	1-1/32	1-3/32	1	15/16	0.6
2-3V235JA	JA	1/2 – 1-1/4	E	2.30	2.35	1	1-3/32	1	29/32	0.6
2-3V250JA	JA	1/2 – 1-1/4	E	2.45	2.50	1	1-3/32	1	29/32	0.7
2-3V265JA	JA	1/2 – 1-1/4	D	2.60	2.65	3/8	1-3/32	1	15/32	0.8
2-3V280JA	JA	1/2 – 1-1/4	D	2.75	2.80	3/8	1-3/32	1	15/32	0.9
2-3V300JA	JA	1/2 – 1-1/4	D	2.95	3.00	3/8	1-3/32	1	15/32	1.2
2-3V315JA	JA	1/2 – 1-1/4	D	3.10	3.15	3/8	1-3/32	1	15/32	1.2
2-3V335SH	SH	1/2 – 1-5/8	D	3.30	3.35	17/32	1-3/32	1-5/16	5/16	1.3
2-3V365SH	SH	1/2 – 1-5/8	D	3.60	3.65	17/32	1-3/32	1-5/16	5/16	1.5
2-3V412SH	SH	1/2 – 1-5/8	D	4.07	4.12	11/32	1-3/32	1-5/16	1/8	2.2
2-3V450SH	SH	1/2 – 1-5/8	D	4.45	4.50	11/32	1-3/32	1-5/16	1/8	2.7
2-3V475SH	SH	1/2 – 1-5/8	D	4.70	4.75	11/32	1-3/32	1-5/16	1/8	3.1
2-3V500SH	SH	1/2 – 1-5/8	D	4.95	5.00	11/32	1-3/32	1-5/16	1/8	3.4
2-3V530SH	SH	1/2 – 1-5/8	D	5.25	5.30	11/32	1-3/32	1-5/16	1/8	3.9
2-3V560SH	SH	1/2 – 1-5/8	D	5.55	5.60	11/32	1-3/32	1-5/16	1/8	4.0
2-3V600SH	SH	1/2 – 1-5/8	D	5.95	6.00	11/32	1-3/32	1-5/16	1/8	4.4
2-3V650SDS	SDS	1/2 – 2	D	6.45	6.50	11/32	1-3/32	1-5/16	1/8	6.0
2-3V690SDS	SDS	1/2 – 2	D	6.85	6.90	11/32	1-3/32	1-5/16	1/8	7.5
2-3V800SDS	SDS	1/2 – 2	D	7.95	8.00	11/32	1-3/32	1-5/16	1/8	8.5
2-3V1060SK	SK	1/2 – 2-5/8	C	10.55	10.60	17/32	1-3/32	1-15/16	5/16	12.5
2-3V1400SK	SK	1/2 – 2-5/8	C	13.95	14.00	17/32	1-3/32	1-15/16	5/16	19.5
2-3V1900SK	SK	1/2 – 2-5/8	C	18.95	19.00	17/32	1-3/32	1-15/16	5/16	27.0
2-3V2500SF	SF	1/2 – 2-15/16	C	24.95	25.00	19/32	1-3/32	2-1/16	3/8	38.0