
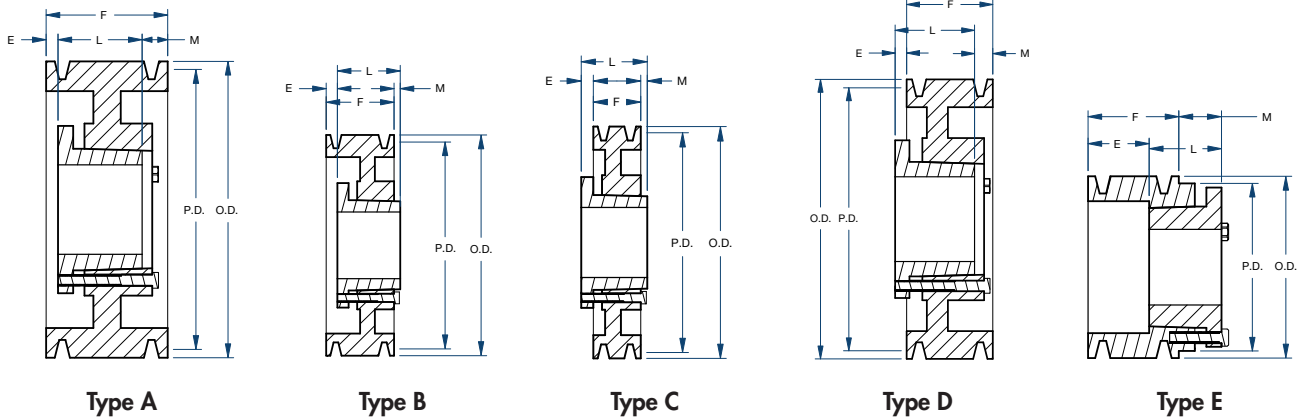


Sheaves

5V SERIES 6 GROOVE/QD

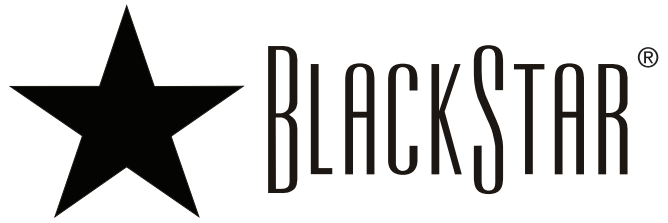

Part Number	Bushing	Bore Range	Type	Diameter (in)		Dimensions (in)				Weight less Bushing (lbs)
				Pitch P.D.	O.D.	E	F	L	M	
6-5V440SD	SD	1/2 – 2	E	4.30	4.40	3-25/32	4-7/16	1-13/16	21/32	10.1
6-5V465SD	SD	1/2 – 2	E	4.55	4.65	3-25/32	4-7/16	1-13/16	21/32	10.4
6-5V490SD	SD	1/2 – 2	A	4.80	4.90	21/32	4-7/16	1-13/16	1-31/32	11.2
6-5V520SD	SD	1/2 – 2	A	5.10	5.20	21/32	4-7/16	1-13/16	1-31/32	12.1
6-5V550SD	SD	1/2 – 2	A	5.40	5.50	21/32	4-7/16	1-13/16	1-31/32	13.3
6-5V590SK	SK	1/2 – 2-5/8	A	5.80	5.90	17/32	4-7/16	1-15/16	1-31/32	14.6
6-5V630SK	SK	1/2 – 2-5/8	A	6.20	6.30	17/32	4-7/16	1-15/16	1-31/32	17.4
6-5V670SF	SF	1/2 – 2-15/16	A	6.60	6.70	25/32	4-7/16	2-1/16	1-19/32	20.0
6-5V710SF	SF	1/2 – 2-15/16	A	7.00	7.10	25/32	4-7/16	2-1/16	1-19/32	21.9
6-5V750SF	SF	1/2 – 2-15/16	A	7.40	7.50	25/32	4-7/16	2-1/16	1-19/32	23.4
6-5V800E	E	7/8 – 3-1/2	A	7.90	8.00	27/32	4-7/16	2-3/4	27/32	24.2
6-5V850E	E	7/8 – 3-1/2	A	8.40	8.50	27/32	4-7/16	2-3/4	27/32	26.7
6-5V900E	E	7/8 – 3-1/2	A	8.90	9.00	27/32	4-7/16	2-3/4	27/32	28.5
6-5V925E	E	7/8 – 3-1/2	A	9.15	9.25	27/32	4-7/16	2-3/4	27/32	30.2
6-5V975E	E	7/8 – 3-1/2	A	9.65	9.75	27/32	4-7/16	2-3/4	27/32	33.8
6-5V1030E	E	7/8 – 3-1/2	A	10.20	10.30	27/32	4-7/16	2-3/4	27/32	36.6
6-5V1090E	E	7/8 – 3-1/2	A	10.80	10.90	27/32	4-7/16	2-3/4	27/32	38.1
6-5V1130E	E	7/8 – 3-1/2	A	11.20	11.30	27/32	4-7/16	2-3/4	27/32	39.8
6-5V1180E	E	7/8 – 3-1/2	A	11.70	11.80	27/32	4-7/16	2-3/4	27/32	41.2
6-5V1250F	F	1 – 4	B	12.40	12.50	23/32	4-7/16	3-3/4	1/32	58.2
6-5V1320F	F	1 – 4	B	13.10	13.20	23/32	4-7/16	3-3/4	1/32	64.0
6-5V1400F	F	1 – 4	B	13.90	14.00	23/32	4-7/16	3-3/4	1/32	66.0
6-5V1500F	F	1 – 4	B	14.90	15.00	23/32	4-7/16	3-3/4	1/32	68.0
6-5V1600F	F	1 – 4	B	15.90	16.00	23/32	4-7/16	3-3/4	1/32	77.5
6-5V1870F	F	1 – 4	D	18.60	18.70	1/32	4-7/16	3-3/4	23/32	85.8
6-5V2120F	F	1 – 4	D	21.10	21.20	1/32	4-7/16	3-3/4	23/32	96.0
6-5V2360J	J	1-1/2 – 4-1/2	C	23.50	23.60	1/8	4-7/16	4-5/8	1/16	113.0
6-5V2800J	J	1-1/2 – 4-1/2	C	27.90	28.00	1/8	4-7/16	4-5/8	1/16	148.0
6-5V3150J	J	1-1/2 – 4-1/2	C	31.40	31.50	1/8	4-7/16	4-5/8	1/16	183.0
6-5V3750J	J	1-1/2 – 4-1/2	C	37.40	37.50	1/8	4-7/16	4-5/8	1/16	218.0
6-5V5000M	M	2 – 5-1/2	C	49.90	50.00	1-3/32	4-7/16	6-3/4	1-7/32	310.0